


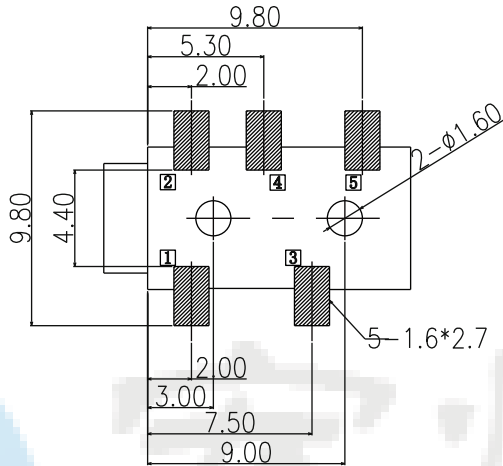
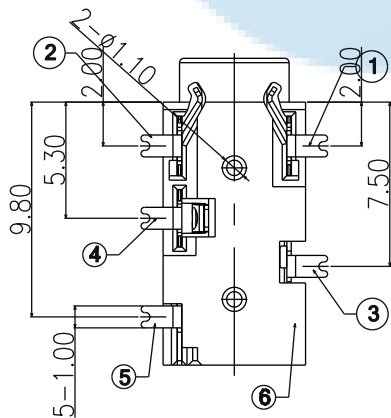
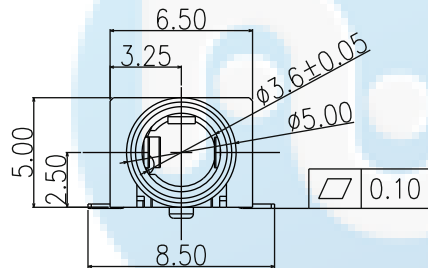


ROHS
Compatible




- NOTES
- CURRENT RATING: 1A.
 - CONTACT RESISTANCE: 50mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - DIELECTRIC WITHSTANDING: 500V AC MIN.
 - DURABILITY: 5000 CYCLES MIN.
 - CONNECTOR MATING FORCES: 3~30N.
 - CONNECTOR UNMATING FORCES: 3~30N.
 - OPERATING TEMPERATURE: -25°C TO +85°C.

E3 x 001 x P x x
 ↓ ↓ ↓ ↓ ↓ ↓
 名称 规格 流水号 PIN位 C;沉板 F;防水
 2;2.5 3;脚 D;插件
 3;3.5 4;脚 S;贴片
 4;4.5 6;脚

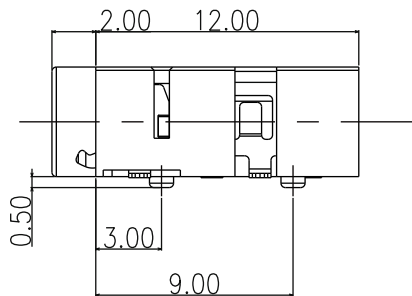

P.C.B LAYOUT

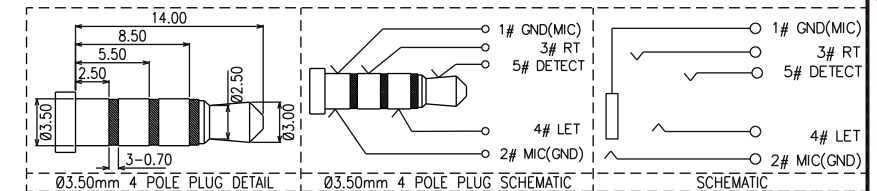

ITEM	NAME	Q'TY	DESCRIPTION
⑥	HOUSING	1	
⑤	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, TIN PLATING ON THE WHOLE
④	TERMINAL 4#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, TIN PLATING ON THE WHOLE
③	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA
②	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, TIN PLATING ON THE WHOLE
①	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, TIN PLATING ON THE WHOLE

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO. E330015PS
 TITLE: Ø3.5mm耳机插座板上型圆头五脚全贴

 **东莞市宏煜盛实业有限公司**
 Dongguan hongyusheng Industry Co., Ltd
 TEL: 0769-81230179 <https://www.hystypec.com>