


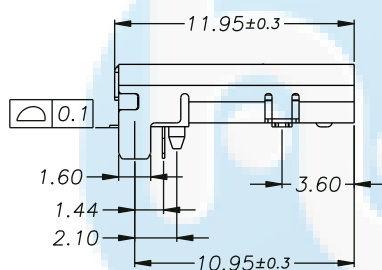

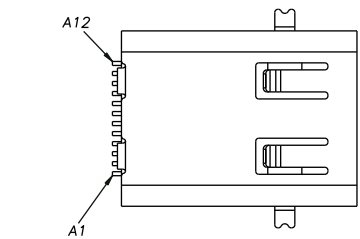


ROHS
Compatible

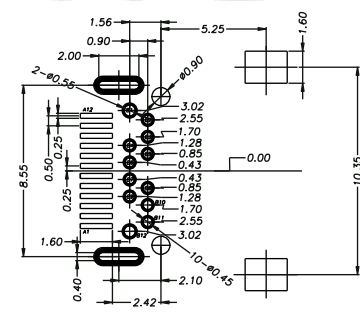

增加外壳脚两边平整度
管控0.08

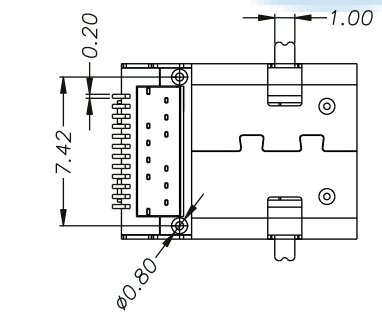

RECOMMENDED PCB LAYOUT(TOP VIEW)

备注:

- 1. 材质:
 - 1.1 胶芯: LCP UL94V-0
 - 1.2 端子: C1814, T=0.12mm; 镀半金锡
 - 1.3 外壳: 不锈钢, T=0.20mm; 镀镍
 - 1.4 接地片: 不锈钢, T=0.10mm;
 - 1.5 卡片: 不锈钢, T=0.15mm;
 - 2. 主要特性:
 - 2.1 额定电流: 3A
 - 2.2 接触阻抗: 40mΩ MAX
 - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度245±5℃, 时间5±0.5s
 - 2.6 整体插入力: 2.0kgf MAX
整体拔出力: 0.8kgf MIN
耐久后拔出力: 0.6kgf MIN
 - 2.7 使用寿命: 10000次
 - 2.8 工作温度: -25℃~+80℃
- U5 143- 24P x x 11.95L
↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 T;带弹 L;长度

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAMF	PIN	SIGNAL NAMF

DESIGN	Li Jinwei	SCALL			DRAWG NO.	U5143-24PNT11.95L
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2°	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		.XX ±0.20 .X°±1°	24P 板上前贴后插DIP+SMT带弹11.95L
				.XXX ±0.10 .XX°±0.5°		

东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>