




ROHS
Compatible

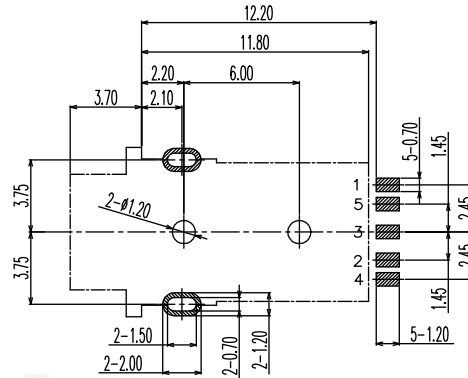






3D VIEW

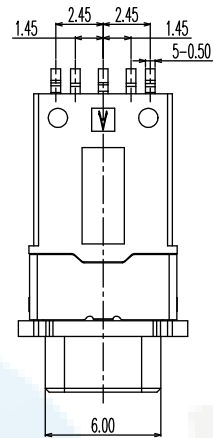

RECOMMENDED P.C.B LAYOUT
TOP VIEW

SPECIFICATION:

1. CURRENT RATING:DC 0.5A MAX.
- 2.VOLTAGE RATING:DC 12V.
- 3:CONTACT RESISTANCE:50mΩ MAX.
4. INSULATION RESISTANCE:100MΩ MIN. AT 500V DC.
5. WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE.
6. LIFE TEST:5000 CYCLES MIN,
7. MATING FORCE:3~30N,
UNMATING FORCE:3~30N.
8. TEPROOF LEVEL:IPX7

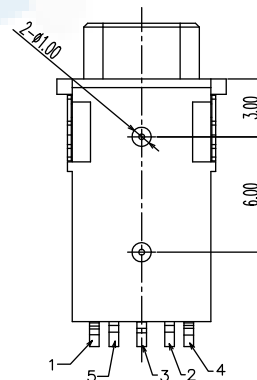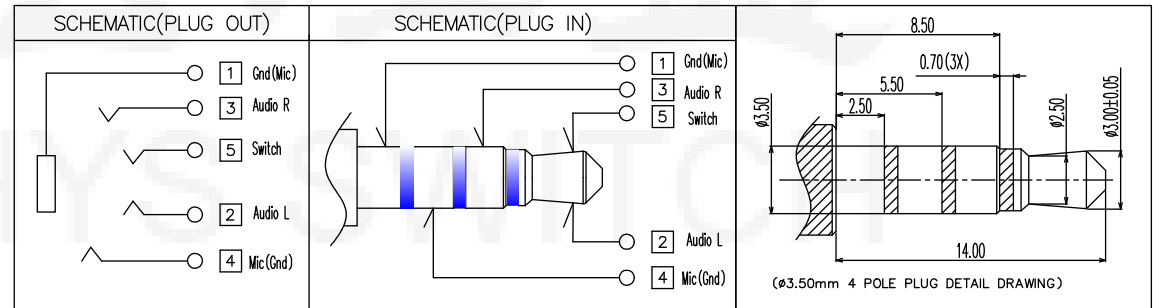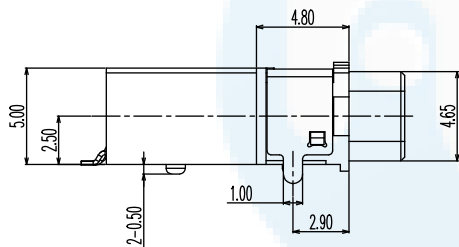

ITEM	NAME	Q'TY	DESCRIPTION
8	COVER	1	HIGH TEMPERATURE PLASTIC COLOR BLACK
7	HOUSING	1	HIGH TEMPERATURE PLASTIC COLOR BLACK
6	SHELL	1	PHOSPHOR BRONZE; NICKEL PLATED OVERALL
5	TERMINAL 5#	1	PHOSPHOR BRONZE; GOLD FLASH ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER
4	TERMINAL 4#	1	
3	TERMINAL 3#	1	
2	TERMINAL 2#	1	PHOSPHOR BRONZE; GOLD FLASH ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER
1	TERMINAL 1#	1	

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

⌀	
TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	PJ-427
TITLE:	3.5mm防水耳机插座 IPX7


东莞市宏煜盛实业有限公司
 Dongguan hongyusheng Industry Co., Ltd
 TEL: 0769-81230179 <https://www.hystypec.com>