


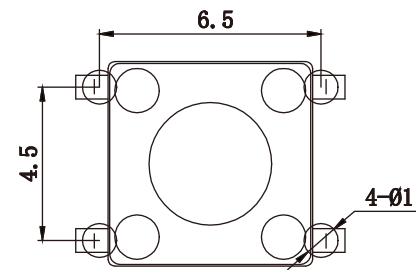
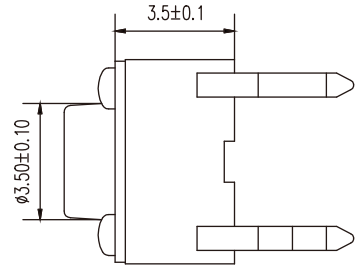
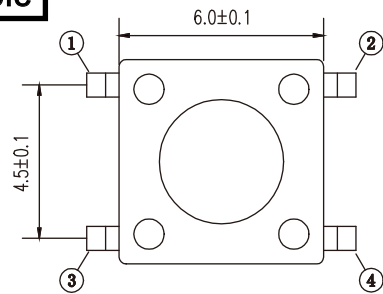


**ROHS**  
Compatible

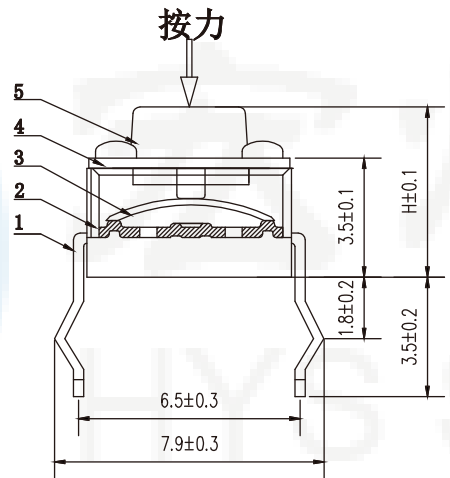

PCB板安装尺寸

电路图

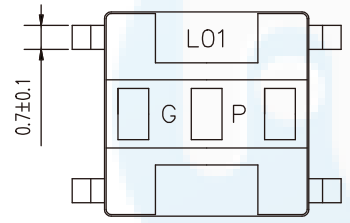

高度	PCS/盘
H=4.2mm	1000
H=4.3mm	1000
H=5.0mm	1000
H=6.0mm	1000
H=7.0mm	750
H=8.0mm	500
H=9.0mm	500
H=9.5mm	500
H=10mm	500
H=10.5mm	500

NO.	NAME	MATERIAL	FINISHING
1	TERMINAL	Brass	Silver plating
2	CASE	PPA	Black
3	CONTACT	SUS301	Silver plating
4	COVER	SUS	White
5	STEM	PPA	Black

SPECIFICATIONS				
Operating temperature rangs	-30° to +85°			
Rating	DC 12V 50mA Max.			
Contact Resistance	100mΩ Max			
Dielectric strength	250V AC for 1min.			
Travel	0.25±0.1mm			
Operating Force	1	2	3	4
	130±30gf	160±30gf	260±40gf	350±50gf
Operating Life(cycles)	100,000			

DESIGN	Li Jinwei	SCALL		
DRAWING	Wu Qifa	UNIT	mm	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	
APPROVAL	Liu Xiaohong	DATE	2020-06-10	

DRAWG NO.	HYS-1101
TITLE:	轻触开关四脚插件 6*6*H

**东莞市宏煜盛实业有限公司**  
 Dongguan hongyusheng Industry Co., Ltd  
 TEL: 0769-81230179 <https://www.hystypec.com>