




ROHS
Compatible




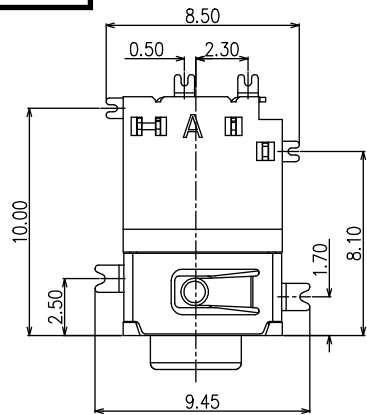


3D VIEW



- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;

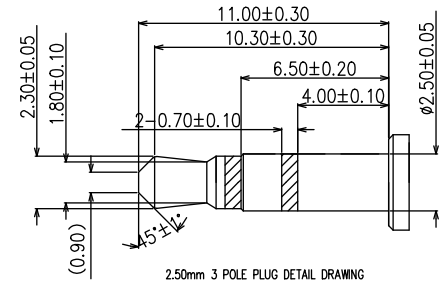

2.50mm 3 POLE PLUG DETAIL DRAWING

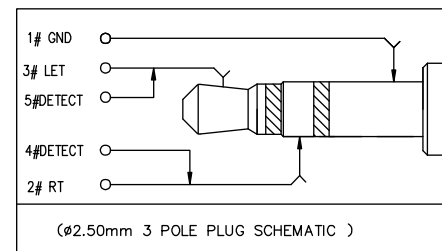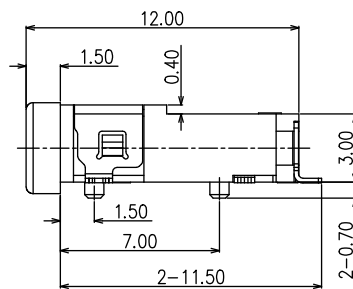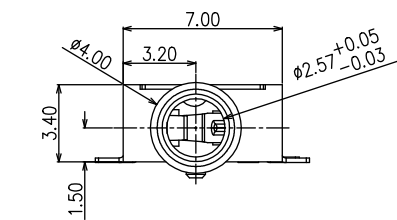

P.C.B LAYOUT
TOP VIEW

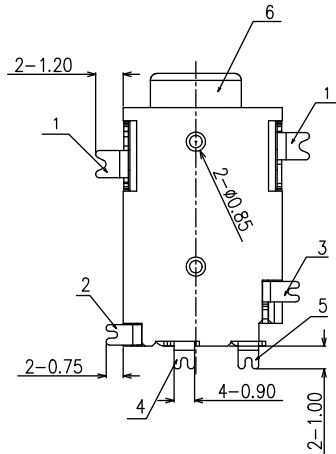

| | | | | |
|------|-------------|------|--|----------|
| 6 | HOUSING | 1 | HIGHT TEMPERATURE PLASTIC COLOR BLACK | |
| 5 | TERMINAL 5# | 1 | COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING. | T=0.20mm |
| 4 | TERMINAL 4# | 1 | COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING. | T=0.20mm |
| 3 | TERMINAL 3# | 1 | COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING. | T=0.20mm |
| 2 | TERMINAL 2# | 1 | COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING. | T=0.20mm |
| 1 | TERMINAL 1# | 1 | COPPER ALLOY; THE BOTTOM OF THE NICKEL ; THE WHOLE SILVER PLATING. | T=0.20mm |
| ITEM | NAME | Q'TY | DESCRIPTION | NOTE |

| | | | |
|----------|---------------|--------|---------------|
| DESIGN | Li Jinwei | SC ALL | |
| DRAWING | Wu Qifa | UNIT | mm |
| CHECK | Zheng Jinxian | SIZE | A4: 210 * 297 |
| APPROVAL | Liu Xiaohong | DATE | 2020-06-10 |

| TOLERANCE | |
|------------|-----------|
| .XX ±0.30 | .X.°±2° |
| .XX ±0.20 | .X.°±1° |
| .XXX ±0.10 | .XX°±0.5° |

| | |
|-----------|-------------|
| DRAWG NO. | PJ-402 |
| TITLE: | Φ2.5mm 耳机插座 |

东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>