




ROHS
Compatible







3D VIEW





NOTES


- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 100 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;
- TERPROOF LEVEL: IPX7;

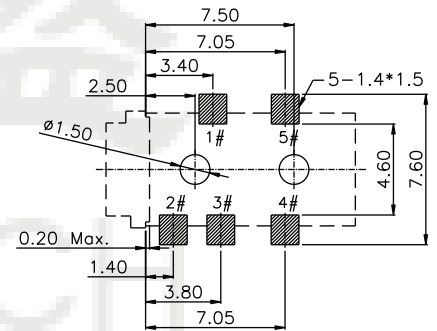


RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

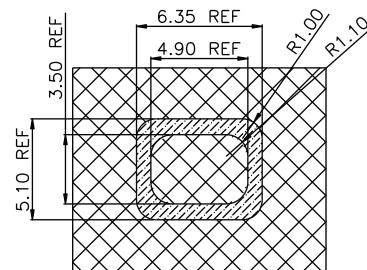

O-ring size
(uncompressed)



面板开孔参考尺寸

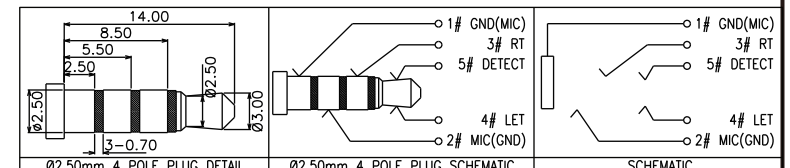

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4		EPOXY	COLOR BLACK	1
3	TERMINAL	PHOSPHOR BRONZE	NICKEL UNDERPLATING OVERALL, GOLD FLASH PLATING ON THE SOLDER & CONTACT AREA	5
2	COVER	HIGH TEMPERATURE	COLOR BLACK	1
1	HOUSING	HIGH TEMPERATURE	COLOR BLACK	1

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°
DRAWING	Wu Qifa	UNIT	mm	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	
APPROVAL	Liu Xiaohong	DATE	2020-06-10	

DRAWG NO.	PJ-554F
TITLE:	防水Φ2.5mm耳机插座

东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>