

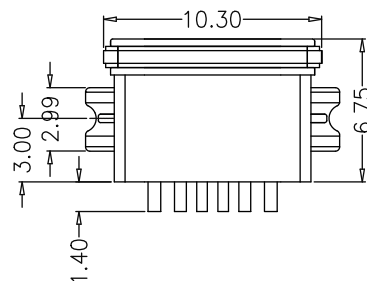



ROHS



Compatible

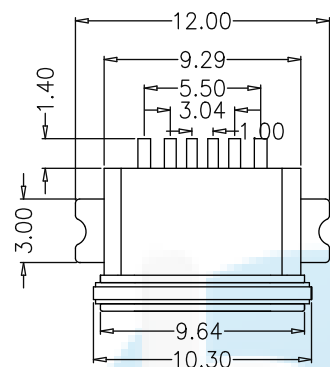

机壳面板

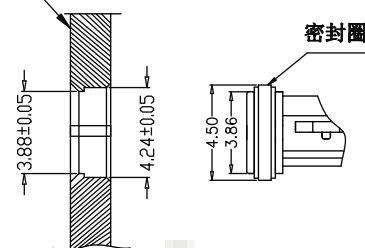

前后组装方式

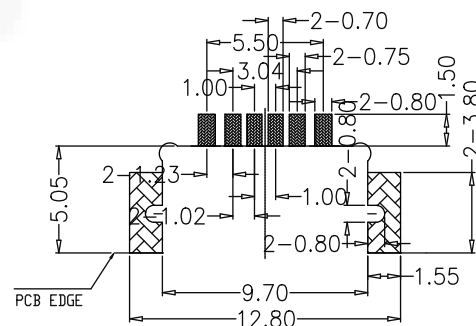

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

Note:

1. Material:

1.1 Housing: LCP

1.2 Contact: C2680, $t=0.20\text{mm}$ middleclip SUS $t=0.15\text{mm}$

1.3 Shell: Zinc Alloy.

2.ELECTRICAL:

2-1:CURRENT RATAING:

VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 3A;

2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS

2-3:DIELECTRIC WITHSTANDING VOLTAGE:

30V AC MIN;

3:MECHANICAL CHARACTERISTICS:

3-1:MATING FORCE:5~20N

3-2:UNMATING FORCE:8~20N(INITIAL).




6~20N(AFTER 10000 CYCLES)

3-3:FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES

3-4: OPERATING TEMPERATURE ; $-40^{\circ} \sim 80^{\circ}$.

4: WATERPROOF: IP-X7.

U5	199-	24P	x	1.6C	6.75L	x
↓	↓	↓	↓	↓	↓	↓
名称	流水号	PIN位	N;母座	C;沉板	L;长度	F;防水





B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

DESIGN	Li Jinwei	SCALL	L		DRAWG NO.	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10			防水6P沉板1.6两脚贴片SMT 脚距1.0mm 6.75L IPX7



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

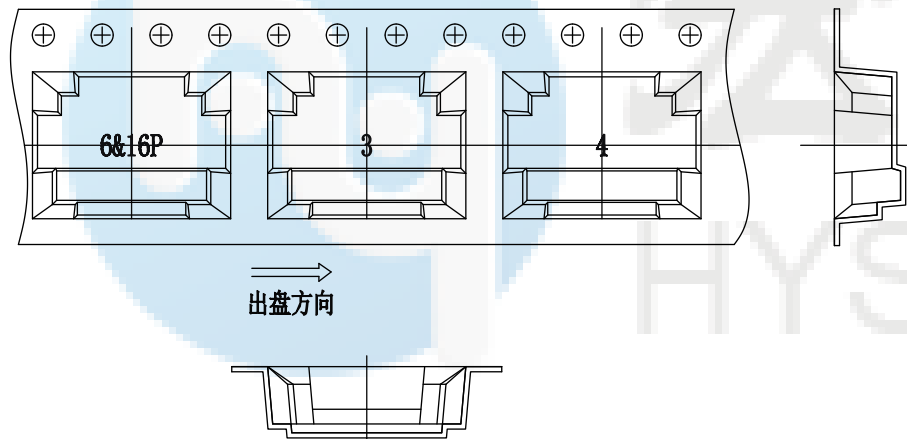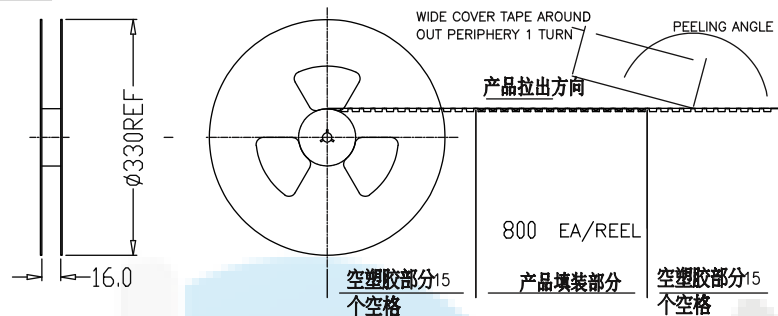


说明: 1, 将检查合格的产品, 放入承载带中, 一盘包装800PCS;

2, 将11承载带放入纸箱中;

3, 将纸箱封好, 贴上标签

每箱数量	净重 (Kg)	毛重 (Kg)
8800PCS	xxx	xxx

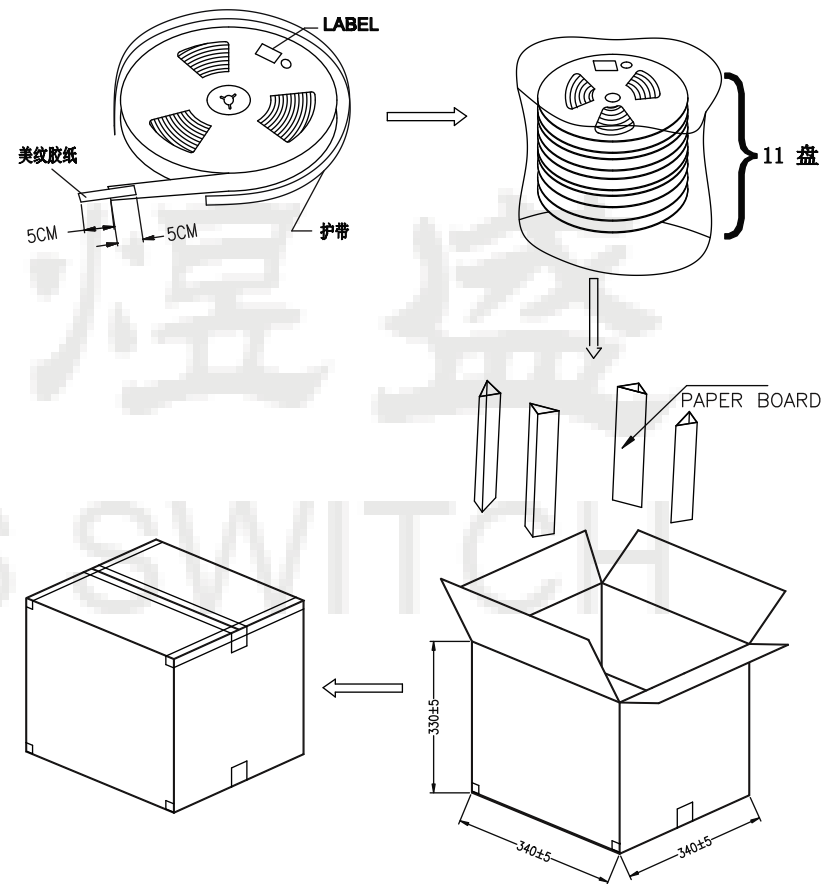

DESIGN	Lí Jínwei	SCALL	L
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5199-24PN1.6C6.75LF
TITLE:	防水6P沉板1.6两脚贴片SMT 脚距1.0mm 6.75L IPX7

 **东莞市宏煜盛实业有限公司**
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>