
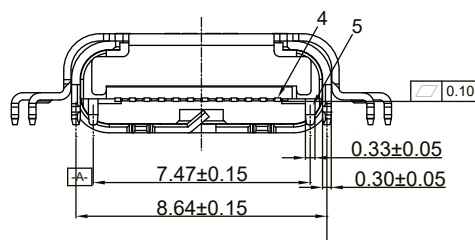





ROHS
Compatible

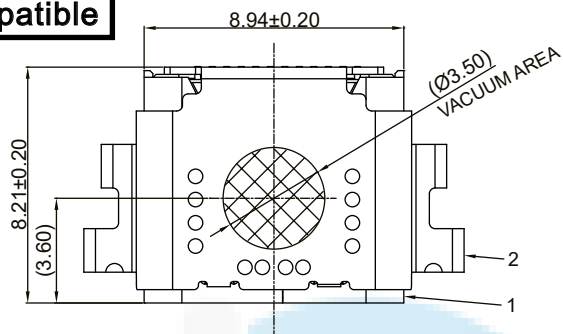

NOTE/注释

1. SPECIFICATION/规格

- 1.1 Rated current(额定电流): 5.0 A
1.2 Voltage rating(额定电压): 5V AC
1.3 Contact Resistance(接触电阻): 40m Ω Max.
1.4 Insulation Resistance(绝缘电阻): 100MΩ Min.
1.5 Withstanding voltage(耐电压): 100V AC/minute
1.6 Mating force(插入力): 5~20N.
1.7 Unmating force(拔出力): 8~20N.
1.8 Durability Cycle(寿命循环): 10,000 cycle
1.9 Operating temperature(工作温度): -40°~+85°
- | | | | | | | |
|----|------|------|------|-------|-------|------------|
| U5 | 150- | 24P | x | 1.08C | 8.21L | XX |
| 名称 | 流水号 | PIN位 | N;母座 | C;沉板 | L;长度 | 端子电镀规格 |
| | | | | | | 01=镀金 1u" |
| | | | | | | 03=镀金 3u" |
| | | | | | | 05=镀金 5u" |
| | | | | | | 15=镀金 15u" |
| | | | | | | 30=镀金 30u" |

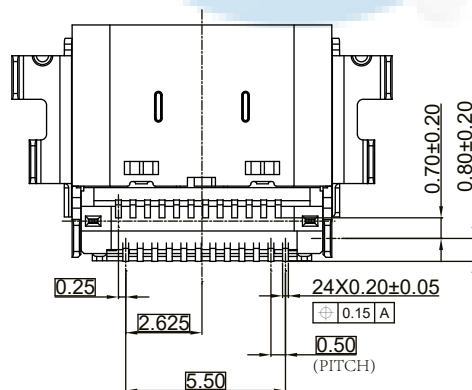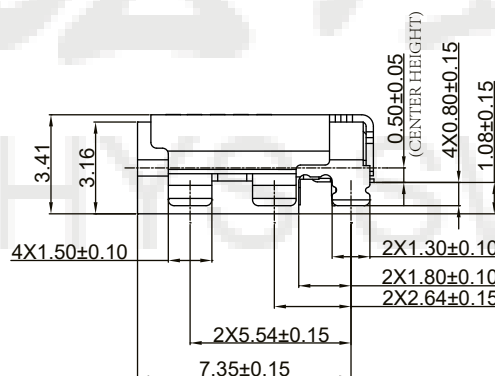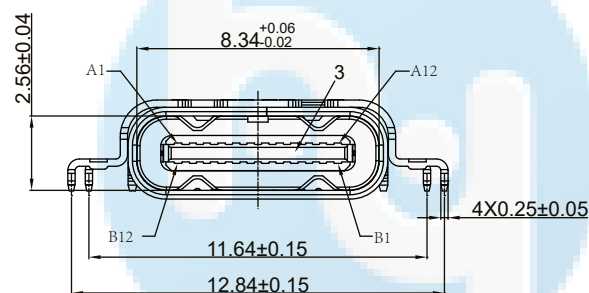

PIN ASSIGNMENT

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.

U5150-24PN1.08C8.21LXX

TITLE:

24P沉板1.08mm 六脚插板有后盖双壳SMT 8.21L




东莞市宏煜盛实业有限公司

Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

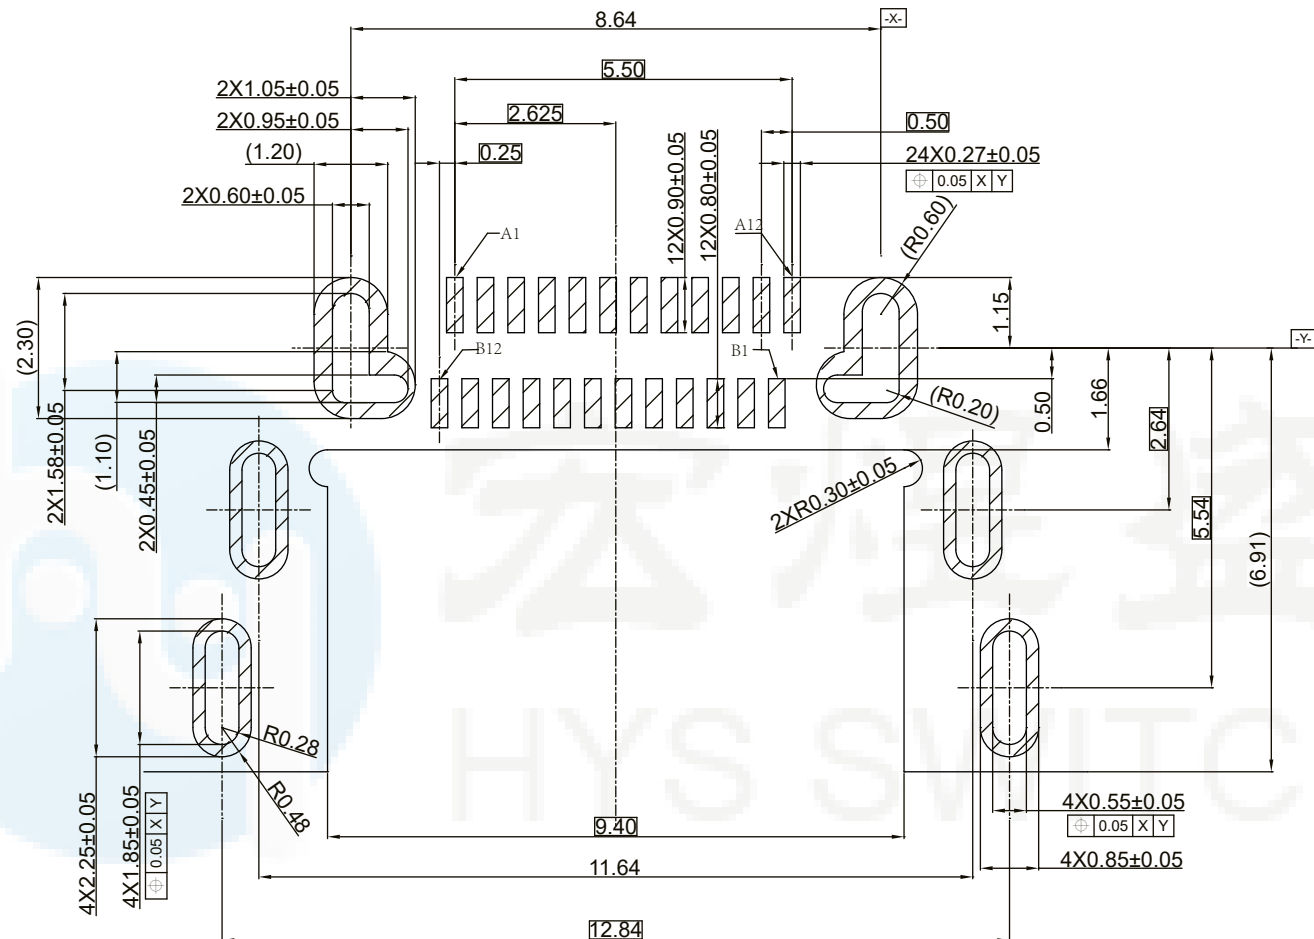





5	MID PLATE	1	SUS301	NICKEL PLATING	T=0.15
4	TERMINAL	24	C18140	MATING SIDE: Au 30u"MIN; SOLDER TAIL: Gold FLASH, 50u" NICKEL OVERALL.	T=0.12
3	MAIN HOUSING		PA9T HF 30%玻纤, UL94 V-0, 黑色		BLACK UL94V-
2	OUT SHELL	1	SUS304	NICKEL PLATING	T=0.25
1	MAIN SHELL	1	SUS304	NICKEL PLATING	T=0.30
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK
BILL OF MATERIAL					

DESIGN	Li Jinwei	SC ALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	U5150-24PN1.08C8.21LXX
DRAWING	Wu Qifa	UNIT	mm		TITLE:	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			24P沉板1.08mm 六脚插板有后盖双壳SMT 8.21L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

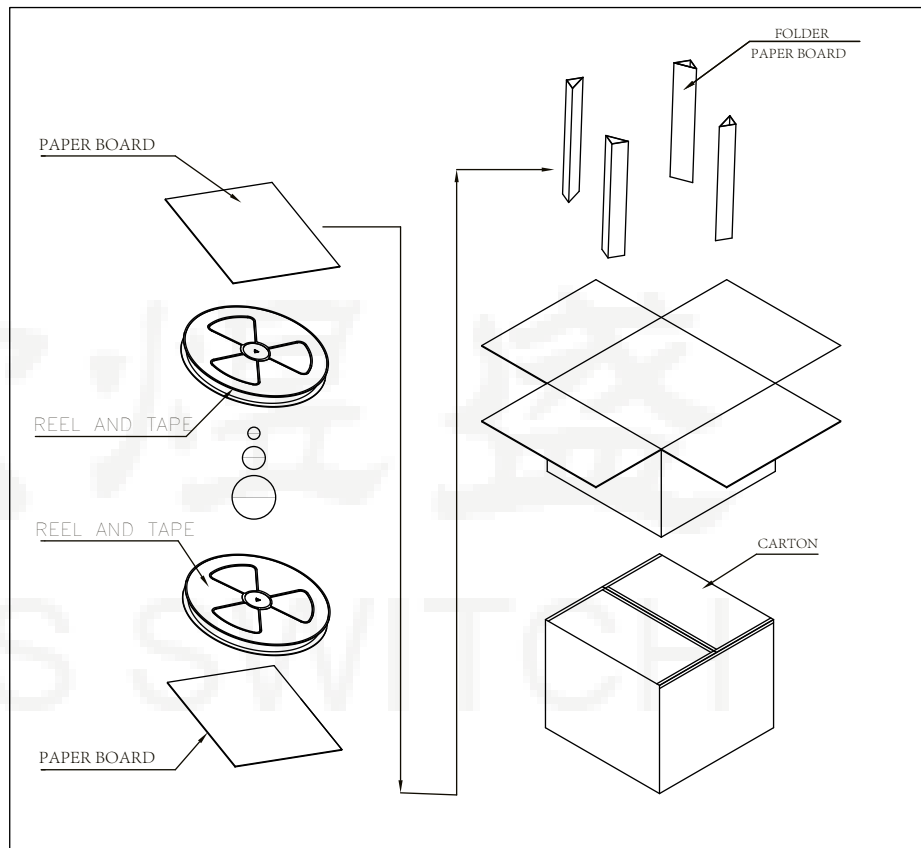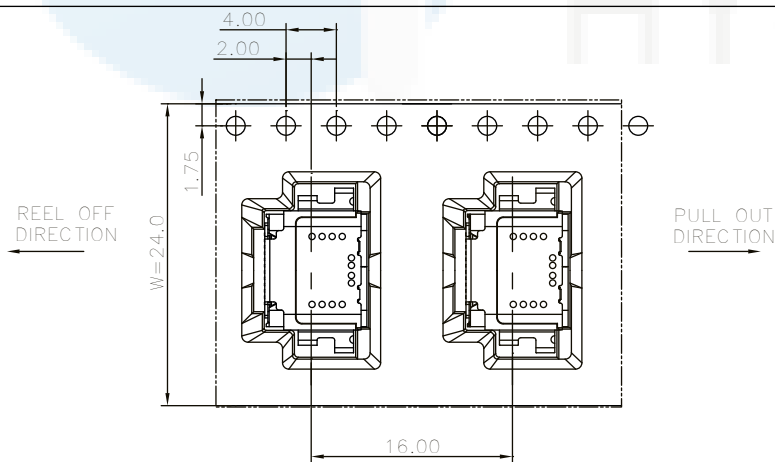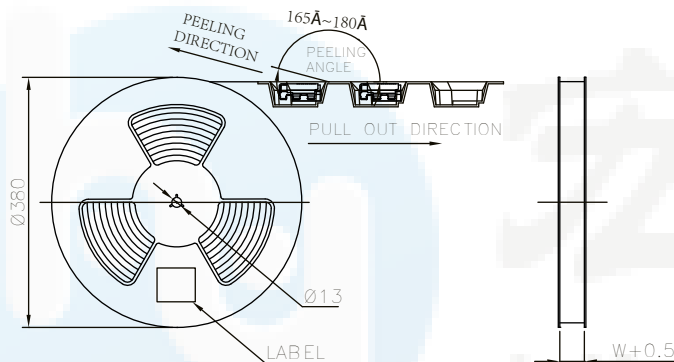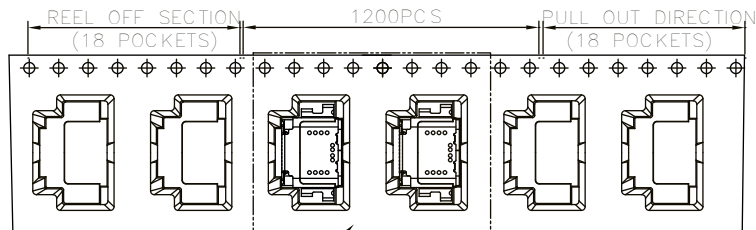

	REEL	CARTON
CONNECTOR (PCS)	1200	12000

DESIGN	Li Jinwei	SC ALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.° ±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX° ±0.5°

DRAWG NO.	U5150-24PN1.08C8.21LXX
TITLE:	24P沉板1.08mm 六脚插板有后盖双壳SMT 8.21L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>