

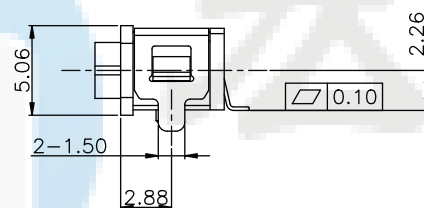

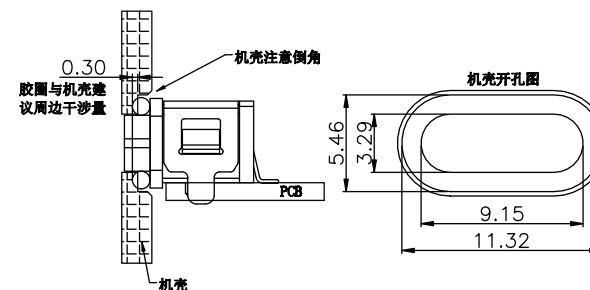
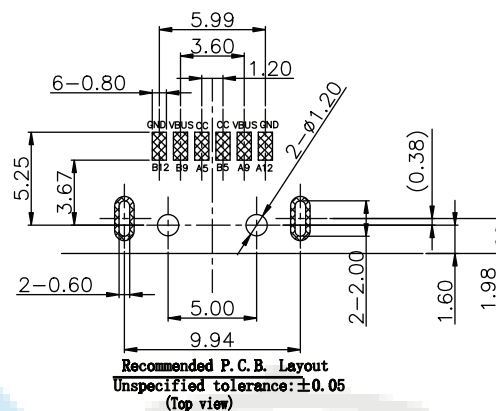



ROHS
Compatible

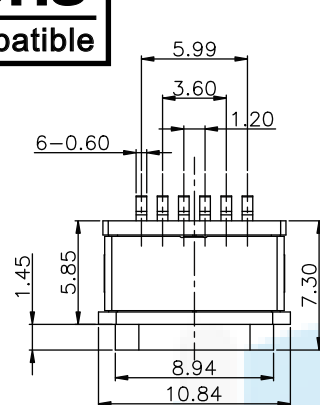


SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES
9. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8.

U5 014- 06P x 7.3L x
↓ ↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 L;长度 F;防水

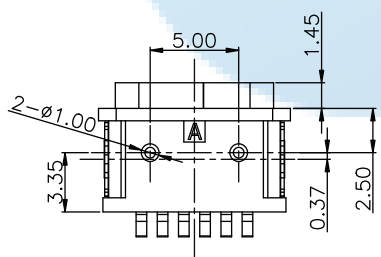

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

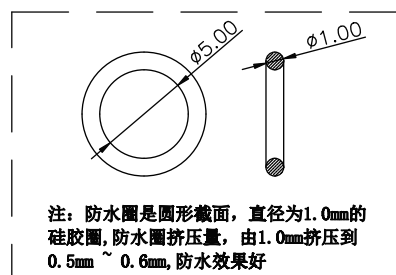



5	Shell2	1	SUS301 Ni Plating T=0.20mm	Ni:40~120u";
4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40~120u";
3	Housing2	1	PA10T(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:1u", OTHER AREA:G/F
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5014-06PN7.3LF
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	TITLE:
				X.X ±0.30 X.°±2°	防水6P 板上型两脚插板SMT 7.3L IPX8
				.XX ±0.20 .X°±1°	
				.XXX ±0.10 .XX°±0.5°	



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

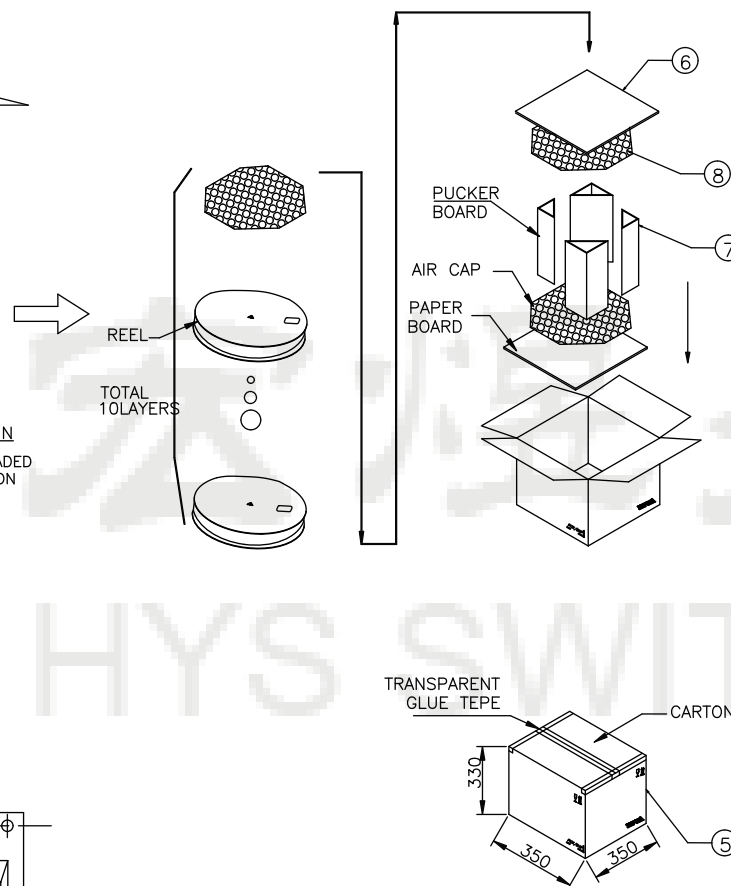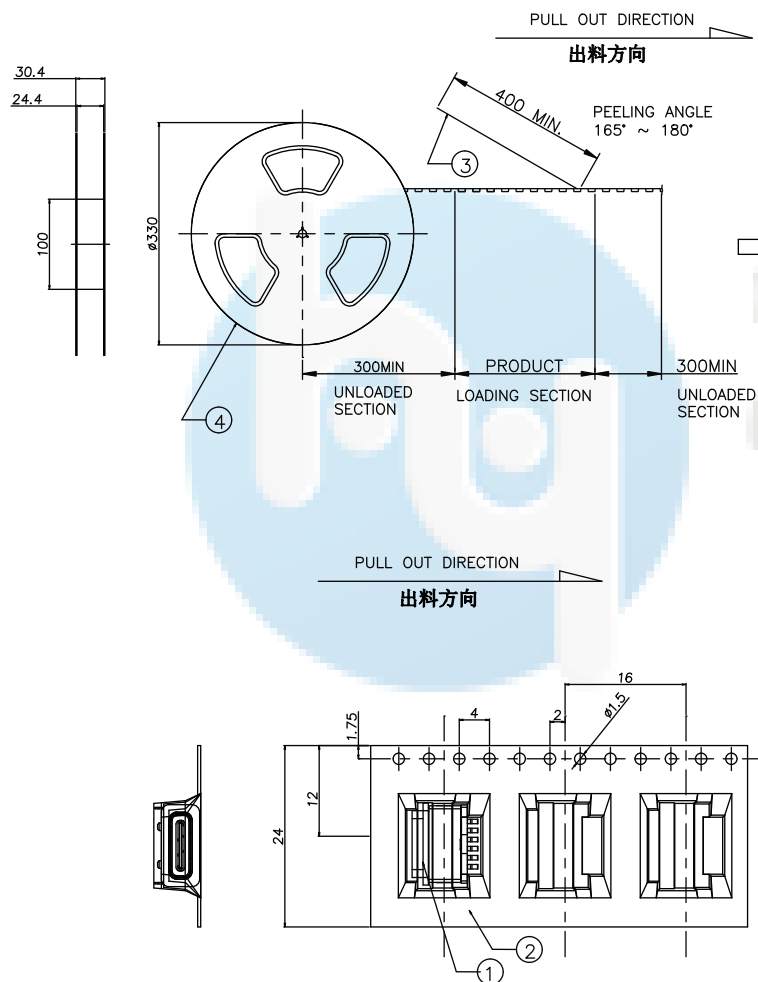

1. 包装方式

1-1: 使用半自動包裝機, 先將 CARRY TAPE 送入導軌中, 並與 COVER TAPE 貼合在上面, 其中前端20空槽不要放產品, 尾端20 空槽不要放產品, 然後將產品如圖所示方向依次放入 CARRY TAPE 每個槽放1PCS:

1.2. 用膠帶將 CARRY TAPE 壓合在一起, 真空包裝後在圖示指定位置貼上 LABEL;

1-3: 按图示要求将10盘包装好的 REEL套入防水袋后装入纸箱, 纸箱上下按图示要求加垫硬纸板和海绵垫, 四角折三角垫固定;

1-4; 将装好产品的纸箱按图示要求封箱, 在指定区域贴好 LABEL;

2. 包裝數量:

600PCS/REEL;
10REEL (6000PCS) /CARTON.

3. 耐剥离性:

上带引拔力测试规格: 20-150gf
测试条件: 以每分钟300mm速度引拔测试

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO. U5014-06PN7.3LF
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE: 防水6P 板上型两脚插板SMT 7.3L IPX8
APPROVAL	Liu Xiaohong	DATE	2020-06-10		



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>