

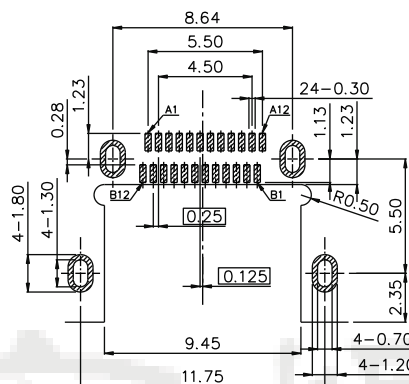

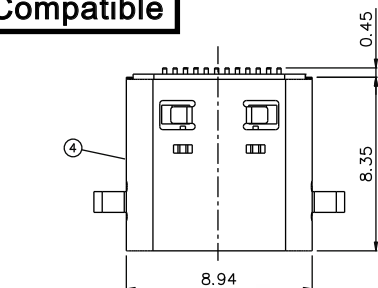
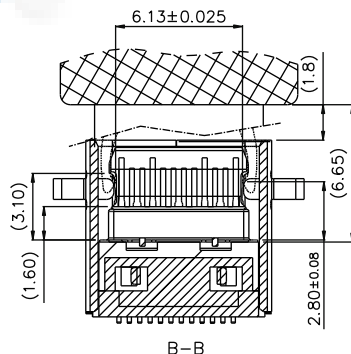




ROHS
Compatible



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

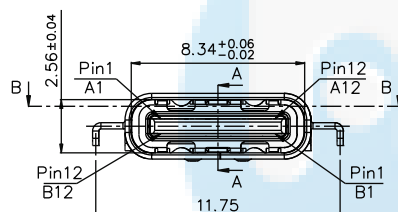

NOTES:

1. MECHANICAL PERFORMANCE,

- 1-1. INSERTION FORCE: 5N~20N.
- 1-2. REMOVAL FORCE: 5N~20N.
- 1-3. DURABILITY: 10000 CYCLES.

2. ELECTRICAL PERFORMANCE,

- 2-1. CURRENT RATING: 5.0A
- 2-2. LLCR: VBUS & GND PINS AND OTHER PINS: 40mΩ /PIN MAX. SHIELD: 50mΩ /MAX.
- 2-3. INSULATION RESISTANCE: 100MΩ MIN
- 2-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.

3. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25° C~+85° C.

U5	310-	24P	x	1.45C	8.35L	x	XX
名称	流水号	PIN位	N;母座	C;沉板	L;长度	A;正口	端子电镀规格
							01=镀金1u"
							03=镀金3u"
							05=镀金5u"
							15=镀金15u"
							30=镀金30u"

PIN ASSIGNMENTS:

PIN No.	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
SIGNAL NAME	GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
PIN No.	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
SIGNAL NAME	GND	RX1+	RX1-	Vbus	SUB2	D-	D+	CC2	Vbus	TX2-	TX2+	GND


⑥	EMI PLATE	1 PCS	SUS304 1/4H T=0.10	
⑤	MID PLATE	1 PCS	SUS 301 3/4H T=0.12	
④	SHELL	1 PCS	SUS 304-1/2H T=0.3	30u" Min. Ni OVER ALL
③	TERMINAL 2(12Pin)	1SET	C7025 TM03 T=0.12	Under Plating: Ni 30u" Contact Plating: Au(See No) Soldering Plating: Au(G/F)
②	TERMINAL 1(12Pin)	1SET	C7025 TM03 T=0.12	
①	HOUSING	1 PCS	HIGH TEMP.THERMOPLASTIC UL94V-0	BLACK
NO.	PART NAME	QTY.	MATERIAL	REMARK

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5310-24PN1.45C8.35LAXX	TITLE: USB4.0 24P 正口 四脚插板SMT 沉板1.45mm 8.35L
DRAWING	Wu Qifa	UNIT	mm			
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

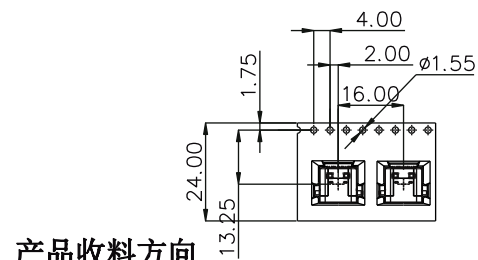

产品收料方向

产品出料方向


上带

空格15PCS

空格15PCS

产品1000PCS

① 产品入载带示意图

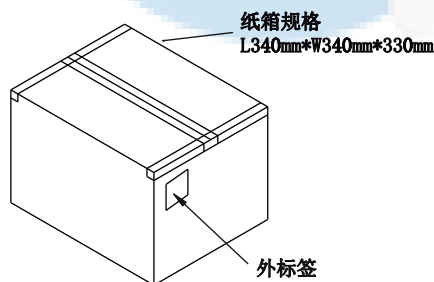


纸箱规格

L340mm*W340mm*330mm


外标签

⑤ 外箱封箱示意图

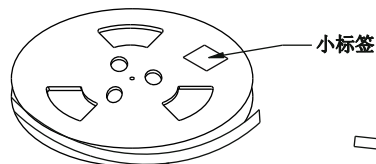


小标签

② 卷盘贴标签示意图



③ 10盘产品叠层示意图

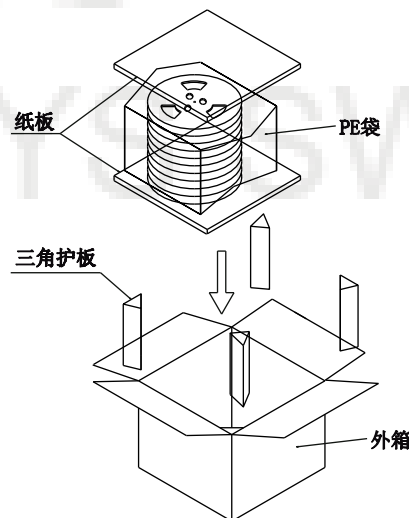

纸板

PE袋

三角护板

外箱

④ 产品入外箱示意图

NOTE:

1. QUANTITY/REEL: 1000 PCS

数量/卷: 1000 PCS

QUANTITY/INNER CARTON: 1000 X 10 = 10000 PCS

数量/箱: 1000 X 10 = 10000 PCS

2. FREE 15 CAVE IN THE FRONT CARRIER AND FREE 15 CAVE IN THE END CARRIER.

包装带内圈空15格, 外圈空15格.

DESIGN	Li Jinwei	SCALL		ϕ	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U5310-24PN1.45C8.35LAXX
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ± 0.30 X. $^{\circ} \pm 2^{\circ}$	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ± 0.20 .X. $^{\circ} \pm 1^{\circ}$	USB4.0 24P 正口 四脚插板SMT 沉板1.45mm 8.35L
				.XXX ± 0.10 .XX. $^{\circ} \pm 0.5^{\circ}$	



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>