

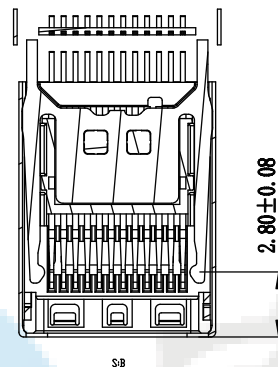
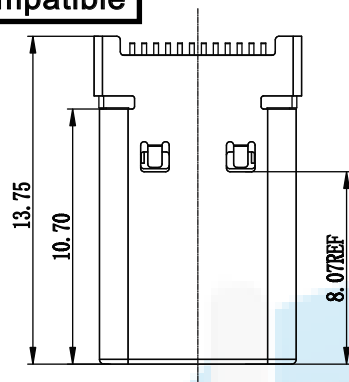
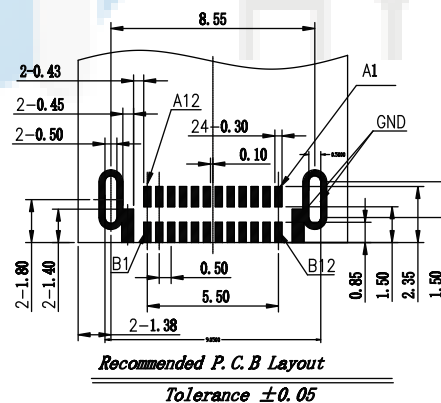
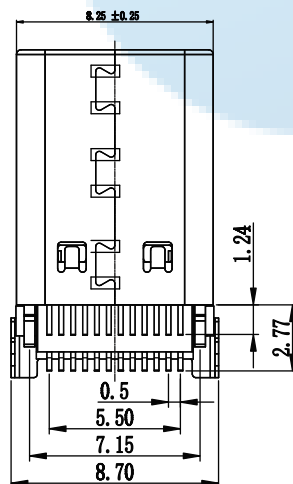
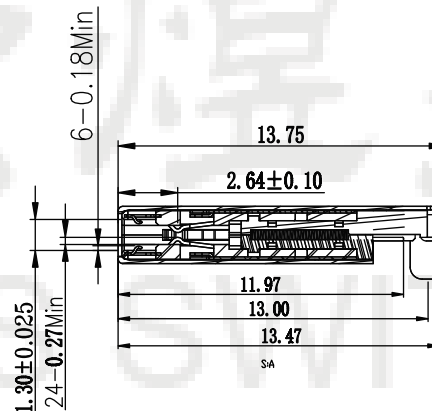


ROHS
Compatible



A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	V _{BUS}	SBU1	D-	D+	CC1	V _{BUS}	TX1-	TX1+	GND
GND	TX2+	TX2-	V _{BUS}	CC2	D+	D-	SBU2	V _{BUS}	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12



G	EMI	2	SUS301	—
F	CONTACT	12	C7025	Au:1U"
E	TOP COVER	1	LCP+30%GF, UL 94V-0	BLACK
D	BOTTOM COVER	1	LCP+30%GF, UL 94V-0	BLACK
C	GND PIN	1	SUS301	30U" min NI on SN Plating
B	CONTACT	12	C7025	Au:1U"
A	SHELL	1	SUS301	50~100U" NICKEL Plating
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

- Material:
Contacts: Copper alloy T=0.15
Insulator: HIGH TEMPERATURE PLASTIC UL 94V-0,
Shell: STEEL T=0.15
MID Plate: Stainless Steel
EMI Plate: Stainless Steel
- Electrical:
Current-max[amps]: 5A Max For Vbus/GND PIN;
0.9A Max For Other PIN.
Withstanding Voltage: 100V AC R.M.S
Contact Resistance [ohms]: 40mΩ Max.For
Initial 10mΩ.Change After
Test.Measure AT 20mV,100mA
Insulation Resistance [ohms]: 100 mΩ min.
- MECHANICAL CHARACTERISTICS:
Mating force: 5~20N
Unmated Force: 6~20N After test.
Durability: 10000 cycles min.
- Plating:
Contacts: SEE TABLE Au plated on contact area,
Fog SN plating 80~100U"Min on solder area
Nickel Under plating 20u"Min over all
Gnd pin: Plating 30u"min Nickel under overall
on solder SN 80u"Min
Shell : plating 50~100U"Nickel over
- Environmental
Temperature Range: -55° C~+85° C

U5 163- 24P x x 0.95C 13.75L
名称 流水号 PIN位 E;公头 D;插板 C;沉板 L;长度


ITEM	Part Name	Part No.	Marker
1	USB TYPE-CM 端子SMT+SMT 不锈钢DIP脚外壳 黑色料雾锡高导电Gold Flash成品 (卷装)	CM-CDS24P095	不锈钢壳镀;黑胶;高导电C7025端子G/F U"

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5163-24PED0.95C13.75L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		公头24P 沉板0.95 两脚插板双排SMT 13.75L




东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>


ROHS
Compatible

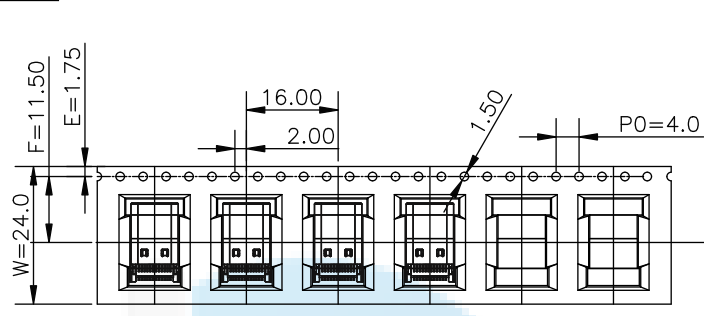


① 产品入载带示意图




② 卷盘贴标签示意图



③ 7盘产品叠层示意图

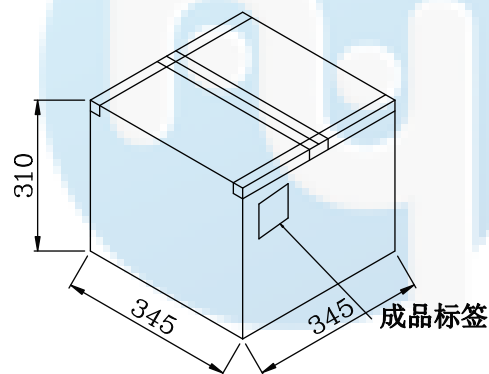

⑤ 外箱封箱示意图

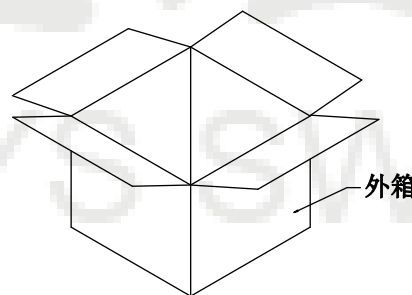

④ 产品入外箱示意图

	REEL	CARTON
CONNECTOR (PCS)	1000	7000

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装1000PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留22PCS空格,后面留22PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,
剥离角度:165° -180°

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5	DRAWG NO.	U5163-24PED0.95C13.75L
DRAWING	Wu Qifa	UNIT	mm		TITLE:	公头24P 沉板0.95 两脚插板双排SMT 13.75L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>