
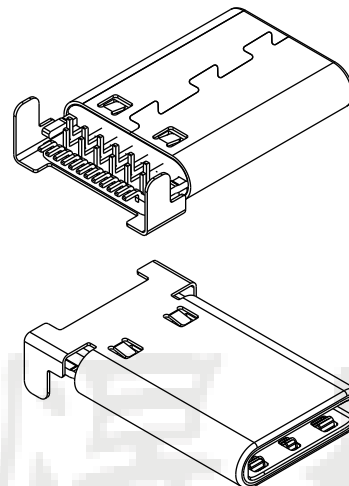
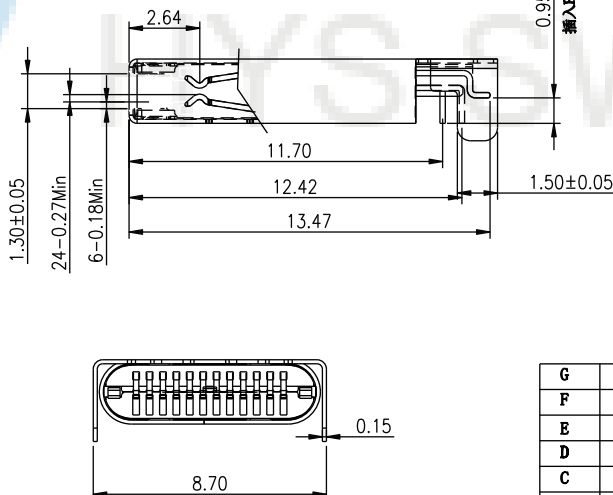
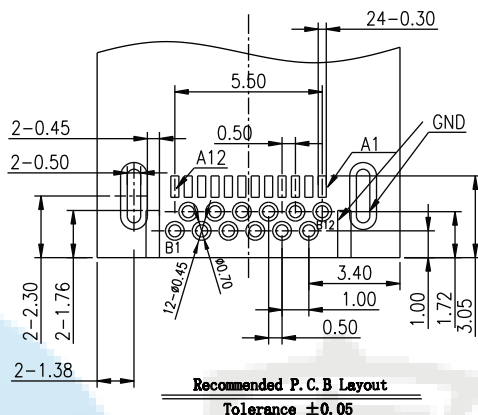
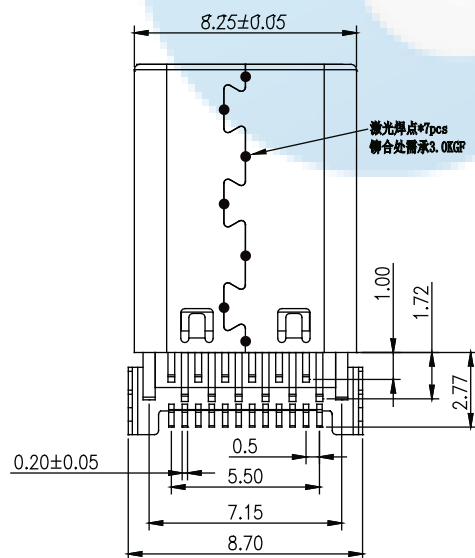



ROHS
Compatible

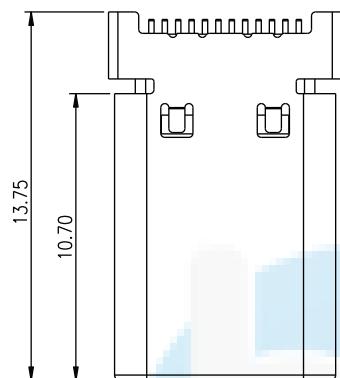

- 1.Material:
Contacts: Copper alloy T=0.15
Insulator: HIGH TEMPERATURE PLASTIC UL 94V-0,
Shell: STEEL T=0.15
- 2.Electrical:
Current-max[amps]: 5A Max For Vbus/GND PIN;
0.9A Max For Other PIN.
Withstanding Voltage: 100V AC R.M.S
Contact Resistance [ohms]: 40mΩ Max For
Initial 10mΩ, Change After
Test, Measure AT 20mV, 100mA
Insulation Resistance [ohms]: 100 mΩ min.
- 3.MECHANICAL CHARACTERISTICS:
Mating force: 5-20N
Unmated Force: 6-20N After test.
Durability: 10000 cycles min.
- 4.Plating:
Contacts: SEE TABLE Au plated on contact area,
Bright Tin plating 80-100u"Min on solder area
Nickel Under plating 20u"Min over all
Shell : plating 20-50u"Nickel over CU
- 5.Environmental
Temperature Range: -40° C~+85° C

U5 163- 24P x x x 0.95C 13.75L
名称 流水号 PIN位 E;公头 D;插件 S;贴片 C;沉板 L;长度

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	Vbus	B9	Vbus
A5	CC	B8	SBU2
A6	D+	B7	
A7	D-	B6	
A8	SBU1	B5	Vconn
A9	Vbus	B4	Vbus
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND

G	EMI	2	SUS301	
F	CONTACT	12	C7025	Au:1U"
E	TOP COVER	1	LCP+30%GF, UL 94V-0	BLACK
D	BOTTOM COVER	1	LCP+30%GF, UL 94V-0	BLACK
C	GND PIN	1	SUS301	20~50U"NICKEL PLATED
B	CONTACT	12	C7025	Au:1U"
A	SHELL	1	SUS301	20~50U"NICKEL PLATED
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR


DESIGN	Li Jinwei	SCALE	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5163-24PDS0.95C13.75L
TITLE:	公头24P 沉板0.95mm 两脚插件DIP + SMT 13.75L

 东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>

ROHS
Compatible

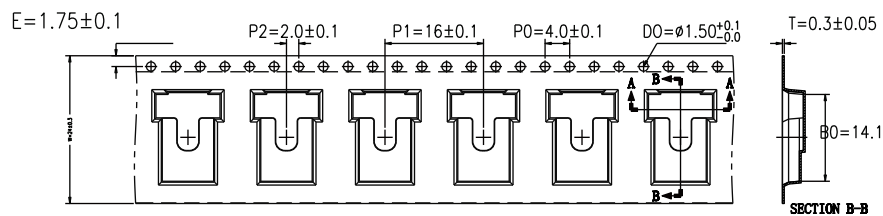

NOTES:

1. 包装数量: 10KPCS箱/10卷/1000PCS/; 当订单量和尾数不足15KPCS时可以合理选择纸箱规格.
 2. 每箱放四袋干燥剂;
 3. 纸箱封盖后以封箱胶封箱, 并于侧面贴上出货标签;
 4. 外箱规格: 35*35*33.5cm;
- 卷盘规格: $\phi 330 \times 29$ mm;



净重:	8.5Kg
毛重:	14.8Kg

6	防水袋	1	PCS
5	护角	4	PCS
4	出货标签	1	PCS
3	外纸箱	1	PCS
2	干燥剂	4	PCS
1	卷盘	10	SET
序号	包装名称	数量	单位


包装收料方向

客户出料方向

客户放料方向

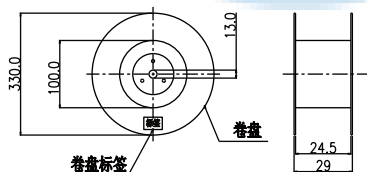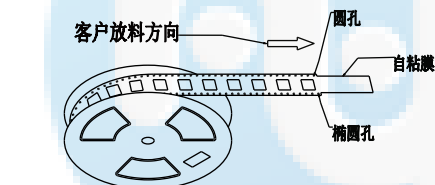

USER DIRECTION OF FEED

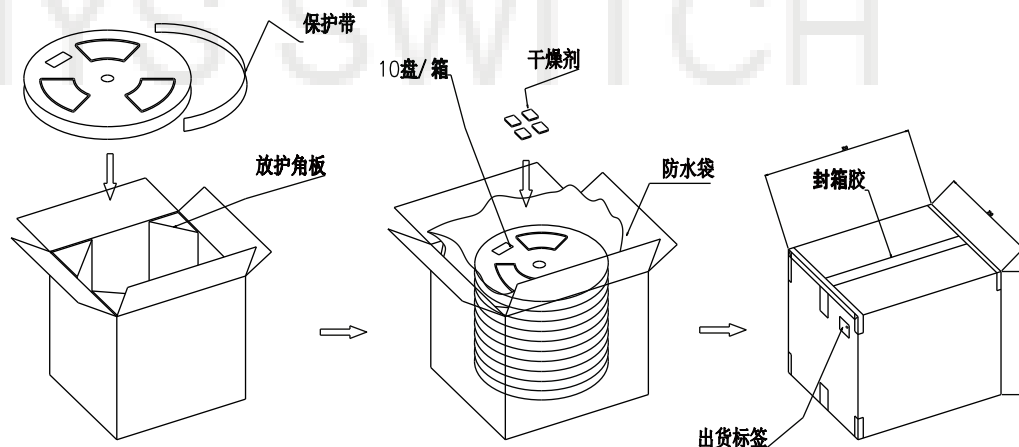

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	
TOLERANCE	
X.X ± 0.30	X. $^{\circ} \pm 2^{\circ}$
.XX ± 0.20	.X. $^{\circ} \pm 1^{\circ}$
.XXX ± 0.10	.XX. $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.	U5163-24PDS0.95C13.75L
TITLE:	公头24P 沉板0.95mm 两脚插板DIP + SMT 13.75L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>