
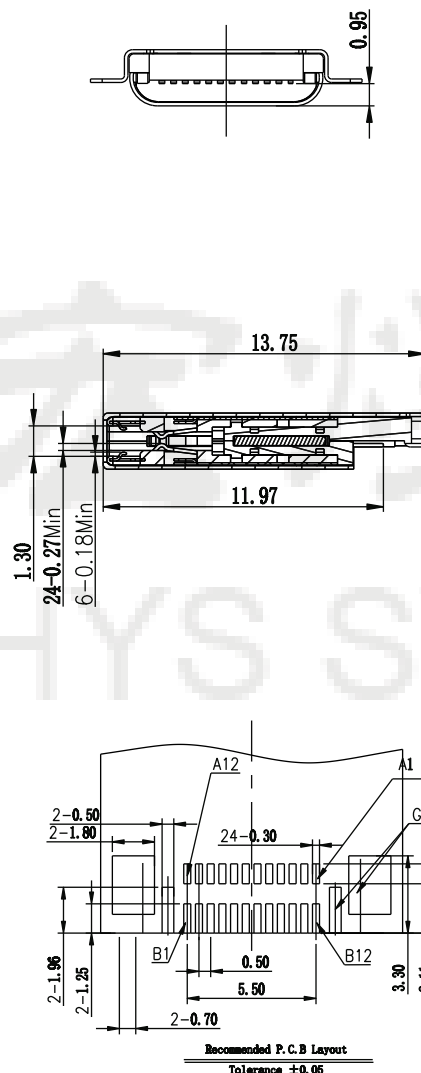


ROHS
Compatible

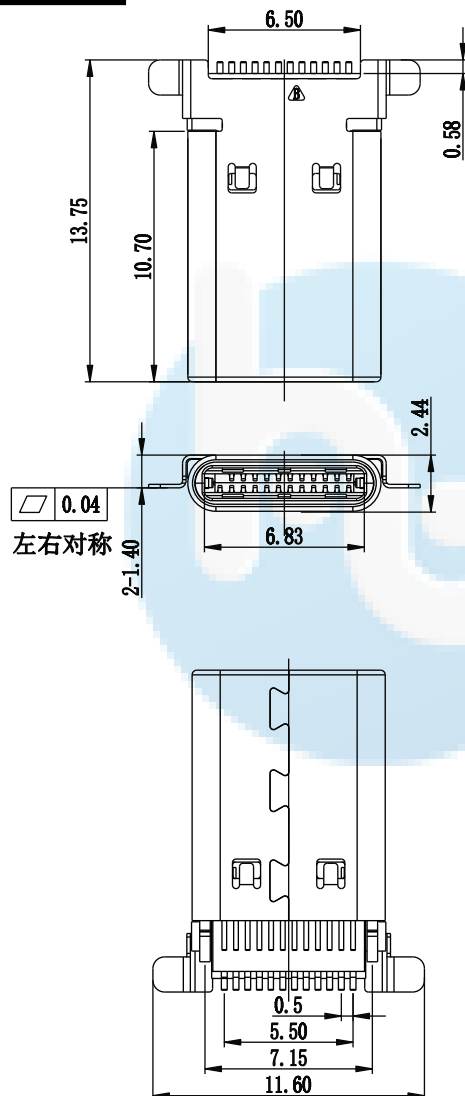

1. Material:

Contacts: Copper alloy T=0.15

Insulator: HIGH TEMPERATURE PLASTIC UL 94V-0,
Shell: STEEL T=0.15

2. Electrical:

Current-max[amps]: 5A Max For Vbus/GND PIN;
0.9A Max For Other PIN.

Withstanding Voltage: 100V AC R. M. S

Contact Resistance [ohms]: 40m Ω Max. For
Initial 10m Ω . Change After
Test. Measure AT 20mV, 100mA

Insulation Resistance [ohms]: 100 m Ω min.

3. MECHANICAL CHARACTERISTICS:

Mating force: 5~20N

Unmated Force: 6~20N After test.

Durability: 10000 cycles min.

4. Plating:

Contacts: SEE TABLE Au plated on contact area,

Bright Tin plating 80~100 μ Min on solder area

Nickel Under plating 20 μ Min over all

Shell : plating 20~50 μ Nickel over CU

5. Environmental

Temperature Range: -40 $^{\circ}$ C~+85 $^{\circ}$ C

U5 163- 24P x x 0.95C 13.75L
名称 流水号 PIN位 E:公头 S:贴片 C:沉板 L:长度

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	V _{BUS}	SBU1	D-	D+	CC	V _{BUS}	TX1-	TX1+	GND
GND	TX2+	TX2-	V _{BUS}	V _{CONN}			SBU2	V _{BUS}	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	
TOLERANCE	
X.X ± 0.30	X. $^{\circ}$ $\pm 2^{\circ}$
.XX ± 0.20	.X. $^{\circ}$ $\pm 1^{\circ}$
.XXX ± 0.10	.XX. $^{\circ}$ $\pm 0.5^{\circ}$

DRAWG NO.

U5163-24PES0.95C13.75L

TITLE:

公头24P 沉板0.95 两脚贴片SMT 13.75L




东莞市宏煜盛实业有限公司


Dongguan hongyusheng Industry Co., Ltd

TEL: 0769-81230179 <https://www.hystypec.com>


ROHS
Compatible

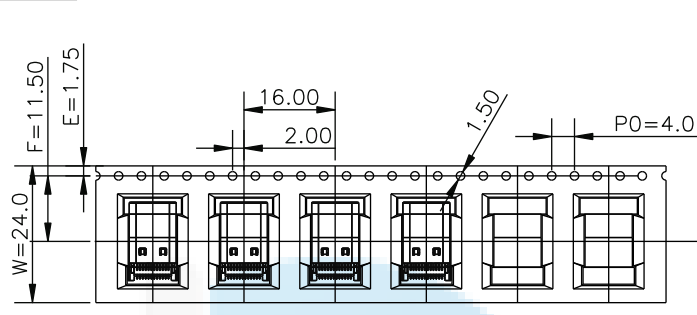


① 产品入载带示意图




② 卷盘贴标签示意图



③ 7盘产品叠层示意图

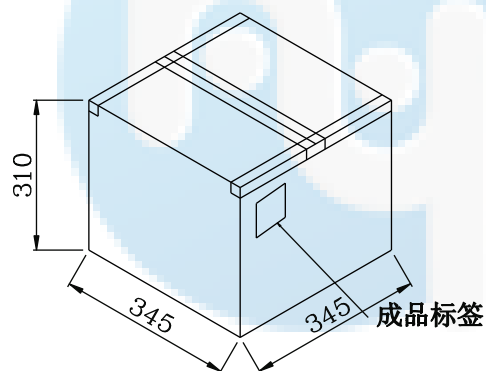

⑤ 外箱封箱示意图

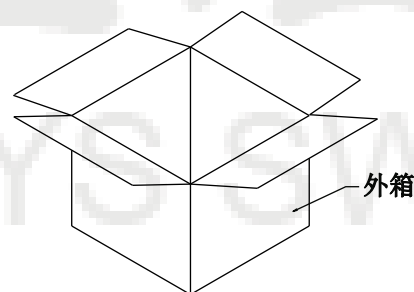

④ 产品入外箱示意图

包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装1000PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每7盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留22PCS空格,后面留22PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,
剥离角度:165° -180°

	REEL	CARTON
CONNECTOR (PCS)	1000	7000

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	
TOLERANCE	
X.X ± 0.30	X. $^{\circ} \pm 2^{\circ}$
.XX ± 0.20	.X. $^{\circ} \pm 1^{\circ}$
.XXX ± 0.10	.XX. $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.
U5163-24PES0.95C13.75L
TITLE:
公头24P 沉板0.95 两脚贴片SMT 13.75L



东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>