
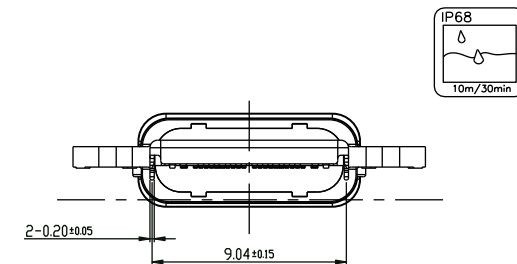
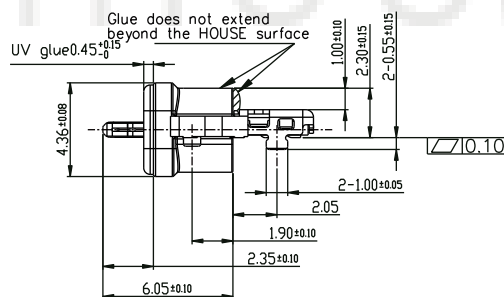
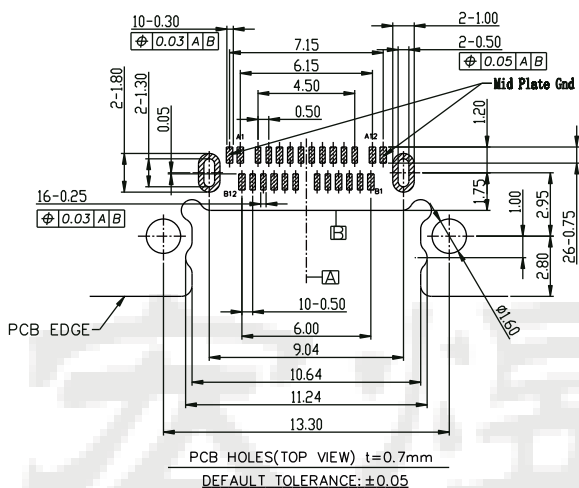
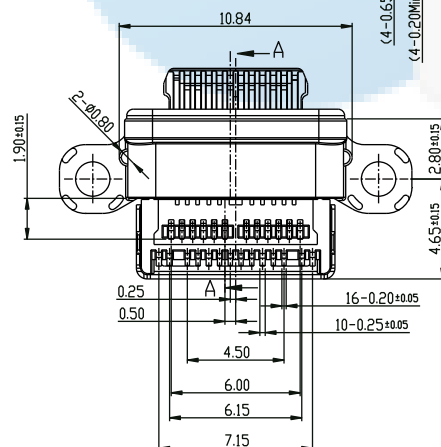
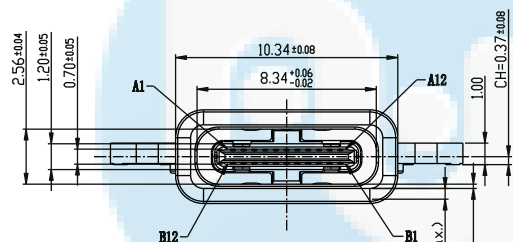


ROHS
Compatible


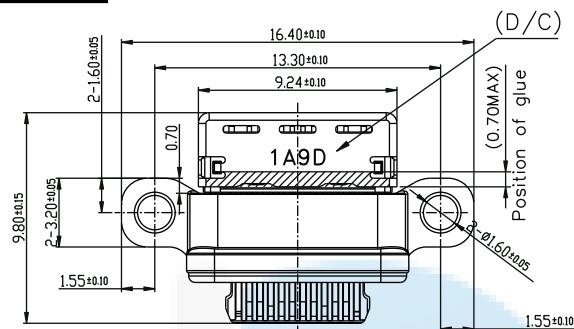


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES

U5 307- 24P x x x 9.8L x
名称 流水号 PIN位 N;母座 M;带耳 W;舌头外露 L;长度 F;防水



13	EM Terminal-2	1pc	STAINLESS STEEL SUS304-1/2H 14-0.05mm								
12	EM Terminal-1	1pc	STAINLESS STEEL SUS304-1/2H 14-0.05mm								
11	GLUE	1pc	EPOXY	BLACK COLOR							
10	Waterproof ring	1pc	UV glue	N/A							
9	GROUND PLATE	1pc	STAINLESS STEEL SUS304-H 1+0.20mm (AREA: 1.25um Ni)								
8	IM SHELL	1pc	STAINLESS STEEL SUS304-H 1+0.20mm (AREA: 1.25um Ni)								
7	SUB SHELL	1pc	STAINLESS STEEL SUS316L 1+0.20mm (AREA: 1.25um Ni)								
6	BOTTOM CONTACT	1pc	C18400 R540 T=0.12mm	As an exposed contact, it is required to be coated with Ni.							
5	TOP CONTACT	1pc	C18400 R540 T=0.12mm	As an out of contact including solder, it is required to be coated with Ni.							
4	INSERT MOLD 3P	3pc	DSM PA46 HF3335	UL94V-0 / BLACK							
3	INSERT MOLD 2P	2pc	DSM PA46 HF3335	UL94V-0 / BLACK							
2	INSERT MOLD 1P	1pc	DSM PA46 HF3335	UL94V-0 / BLACK							
1	HSG IM SHELL	1pc	NYLON PA101 WCNYL R6030H	UL94V-0 / BLACK							
ITEM	NAME	QTY	MATERIAL	FINISH							
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X.°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5307-24PNMW9.8LF
TITLE:	防水24P 板上两脚插板SMT 带耳 舌头外露 9.8L IP68

东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>