
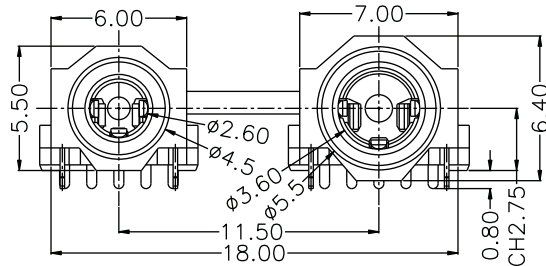
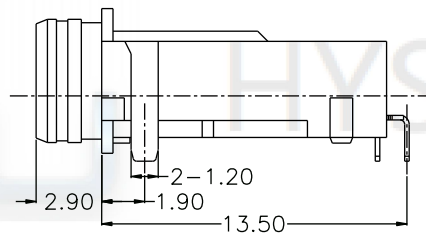
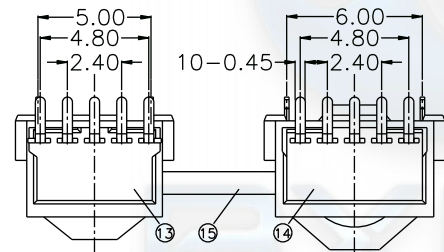
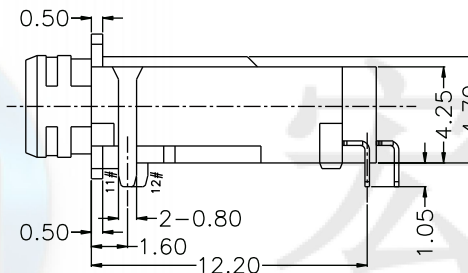




ROHS
Compatible

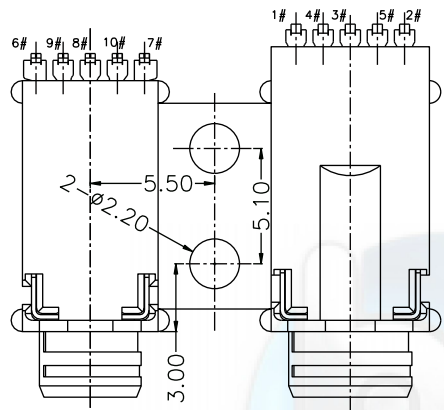

Notes:


- 1.Current Rating: 12V&1A max.
- 2.Contact Resistance: 100mOhms Max.(initial)
- 3.Insulation Resistance: 100M Ohms Min./500V DC
- 4.Dielectric Withstanding Voltage: 500V AC/1Minute
- 5.Mating Force: 30N Max, Withdrawal Force: 3N Min.
- 6.Durability: 5,000 Cycles
- 7.Operating Temperature:-25°C to+85°C

PJ xA 106- 07 x
↓ ↓ ↓
名称 规格 流水号 PIN位 D;插件
2.5+3.5 7;脚

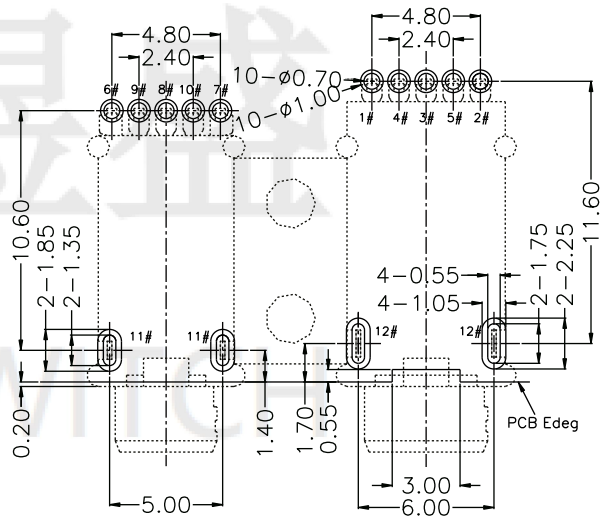


RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

ø3.5mm Circuit Diagram



ø2.5mm Circuit Diagram



15	Housing	High.	Block UL 94-V0
14	5.5mm Cover	Thermoplastics	
13	2.5mm Cover		
12	5.5mm TAB		Ni Plated Overall.
11	2.5mm TAB		
10	2.5mm Switch		
9	2.5mm Left		
8	2.5mm Right		
7	2.5mm GND		
6	2.5mm Mic		
5	5.5mm Switch		
4	5.5mm Left		
3	5.5mm Right		
2	5.5mm GND		
1	5.5mm Mic		
Item	Name	Material	Description

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	PJ25+35A106-07D
TITLE:	耳机插座 七脚插板二合一(Φ2.5+Φ3.5)

 **广东宏煜盛电子科技有限公司**
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>