

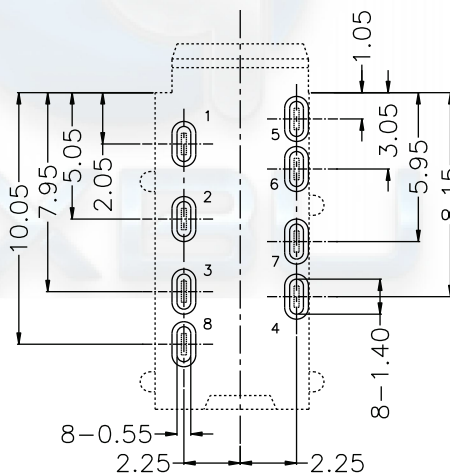



ROHS
Compatible

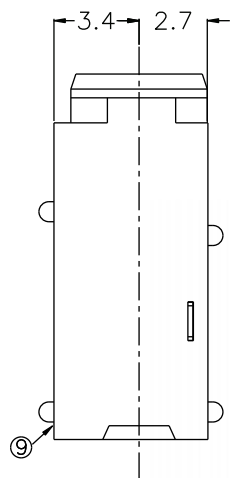


RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05



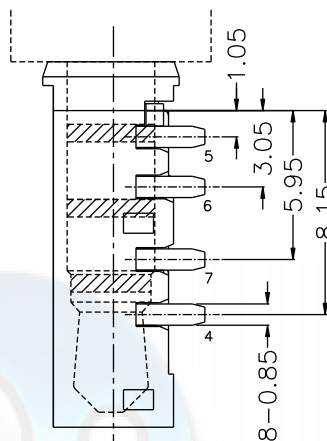


Notes:

- 1.Current Rating: 12V&1A max.
- 2.Contact Resistance:
To Plug: 100mOhms Max.(initial)
To Switch: 150mOhms Max.(initial)
- 3.Insulation Resistance: 100M Ohms Min./500V DC
- 4.Dielectric Withstanding Voltage: 500V DC/1Minute
- 5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
- 6.Durability: 5,000 Cycles
- 7.Operating Temperature: -25°C to $+85^{\circ}\text{C}$

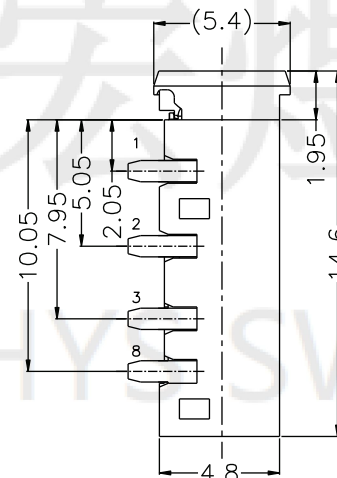

PJ xA 128- 08 x
名称 规格 流水号 PIN位 D;插件
3.5 8;脚

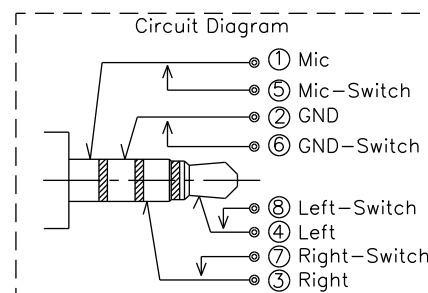

9	Housing	Thermoplastics	Black 94-V0
8	Left-Switch	Stainless steel	G/F On Contact Area Sn On Solder Tails Ni Plated Overall.
7	Right-Switch		
6	GND-Switch		
5	Mic-Switch		
4	Left Contact		
3	Right Contact		
2	GND Contact		
1	Mic Contact		
Item	Name	Material	Description

DESIGN	Li Jinwei	SCALL		ϕ
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ± 0.30 X. $^{\circ} \pm 2^{\circ}$
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ± 0.20 .X $^{\circ} \pm 1^{\circ}$
				.XXX ± 0.10 .XX $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.

PJ35A128-8D

TITLE:

Φ3.5耳机插座 八脚插板



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>