


ROHS
Compatible




NOTES:

SPECIFICATION:




1. CURRENT RATING: 5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES



点焊位置

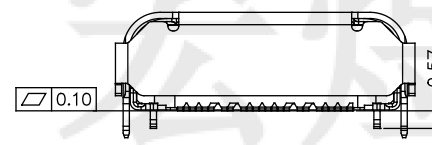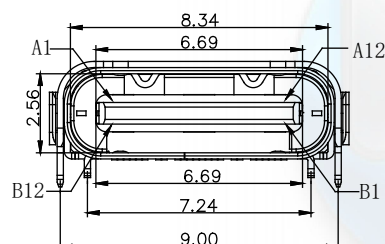

U5 460- 24P x 7.11L
名称 流水号 PIN位 N;母座 L:长度

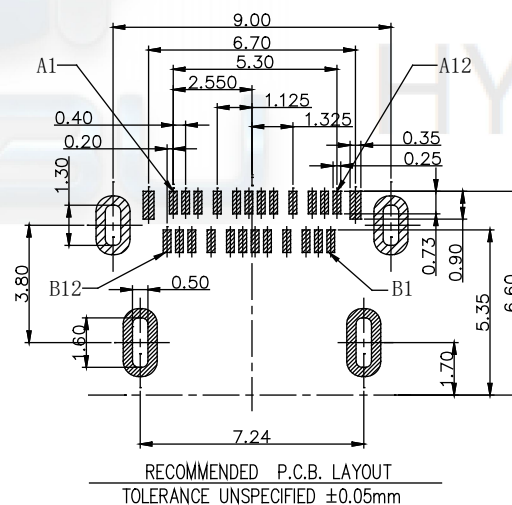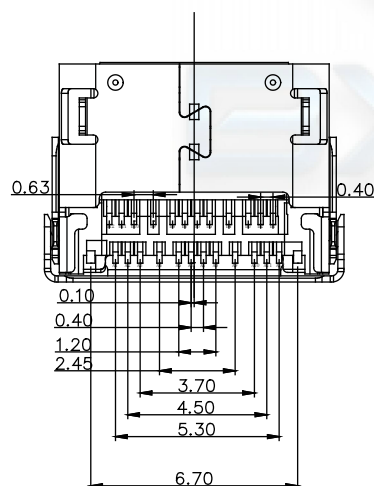

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	SHELL	SUS304-1/2H	NI Plated	1PCS
3	SHIELDING PLATE	SUS301-1/2H	NI/SN Plated	1PCS
2	CONTACT	C7025	Au/Ni Plated	2SET
1	HOUSING	LCP	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

DRAWG NO.

U5460-24PN7.11L

TITLE:

24P 四脚插板SMT 双壳 7.11L










广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

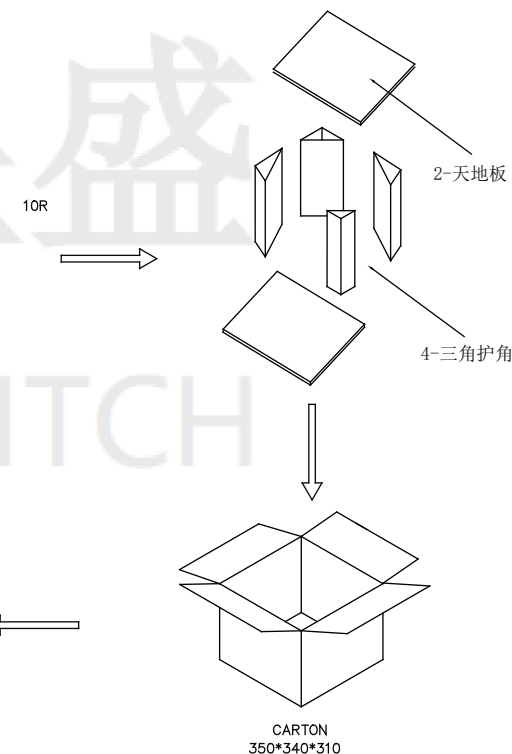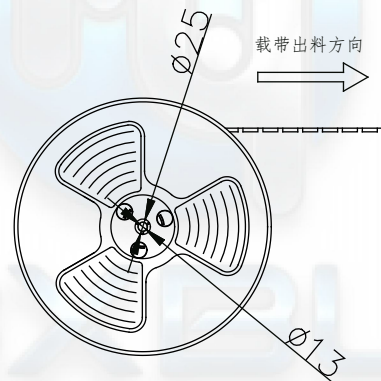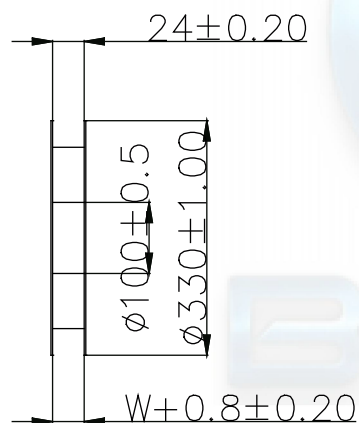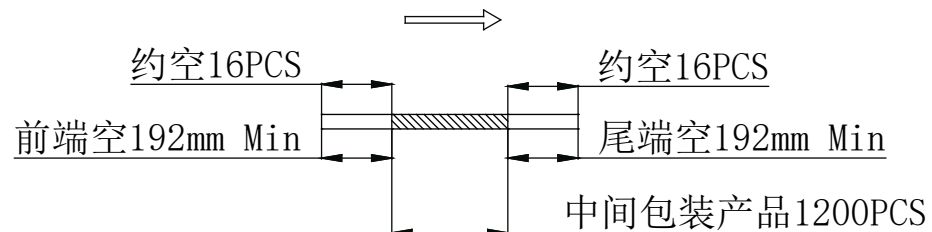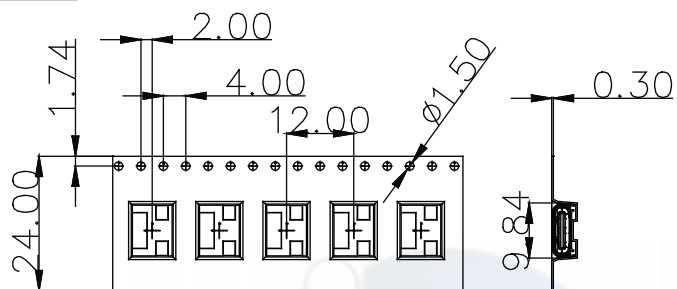

NOTE:

1. QUANTITY/REEL: 1200 PCS
數量/卷: 1200 PCS
QUANTITY/INNER CARTON: 1200 X 10 = 12000 PCS
數量/箱: 1200 X 10 = 12000 PCS
2. FREE 16 CAVES IN THE FRONT CARRIER ADN FREE
16 CAVES IN THE END CARRIER.
包裝帶內圈空16格, 外圈空16格.

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd TEL:0752-6632356 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		U5460-24PN7.11L	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P 四脚插板SMT 双壳 7.11L	