
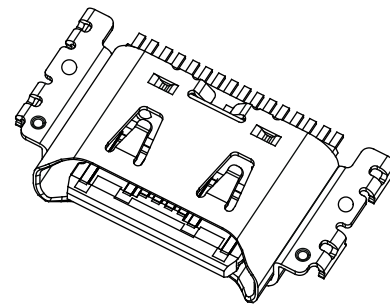

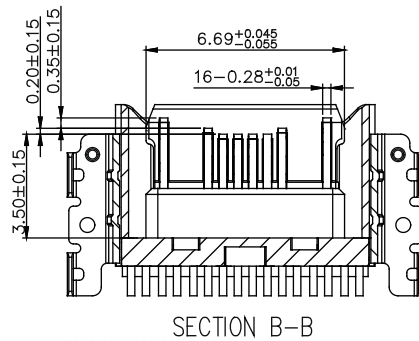
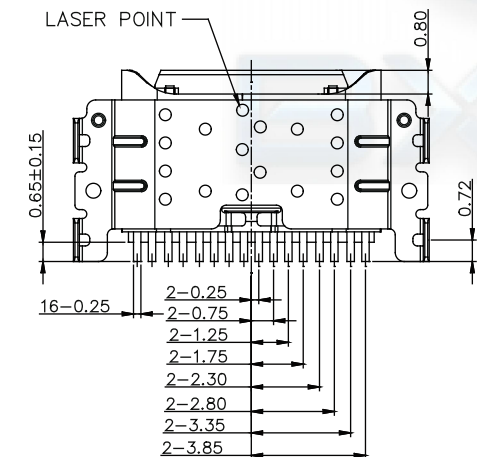
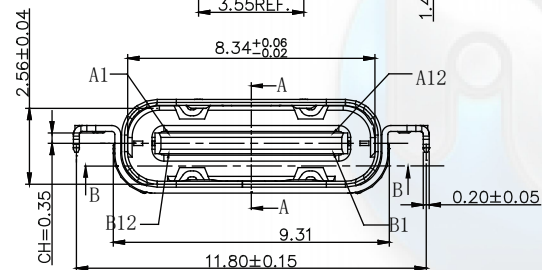


ROHS
Compatible

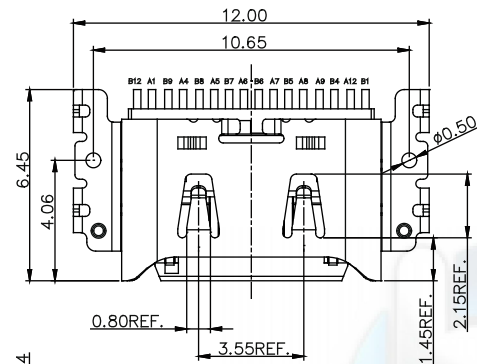

SPECIFICATION:

1. CURRENT RATING: 5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
7. INSERTION FORCE : 5N~20N
8. UNMATING FORCE: 8N~20N
9. DURABILITY: 10,000 CYCLES

U5 462- 16P x 2.03C 6.45L
名称 流水号 PIN位 N;母座 C;沉板 L;长度

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	UPPER SHELL	SUS 304-H	NI30u Min	1PCS
4	SHELL	SUS 304-H	NI30u Min	1PCS
3	SHIELDING PLATE	SUS 301-H	NO Plated	1PCS
2	CONTACT	C7025	Au3u/Ni50u Plated	1SET
1	HOUSING	PA9T UL94V-0	BLACK	1SET
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10




TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5462-16PN2.03C6.45L
TITLE:	16P 四脚插板SMT 沉板2.03mm CH=0.35mm 6.45L

 **广东宏煜盛电子科技有限公司**
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>

ROHS

Compatible

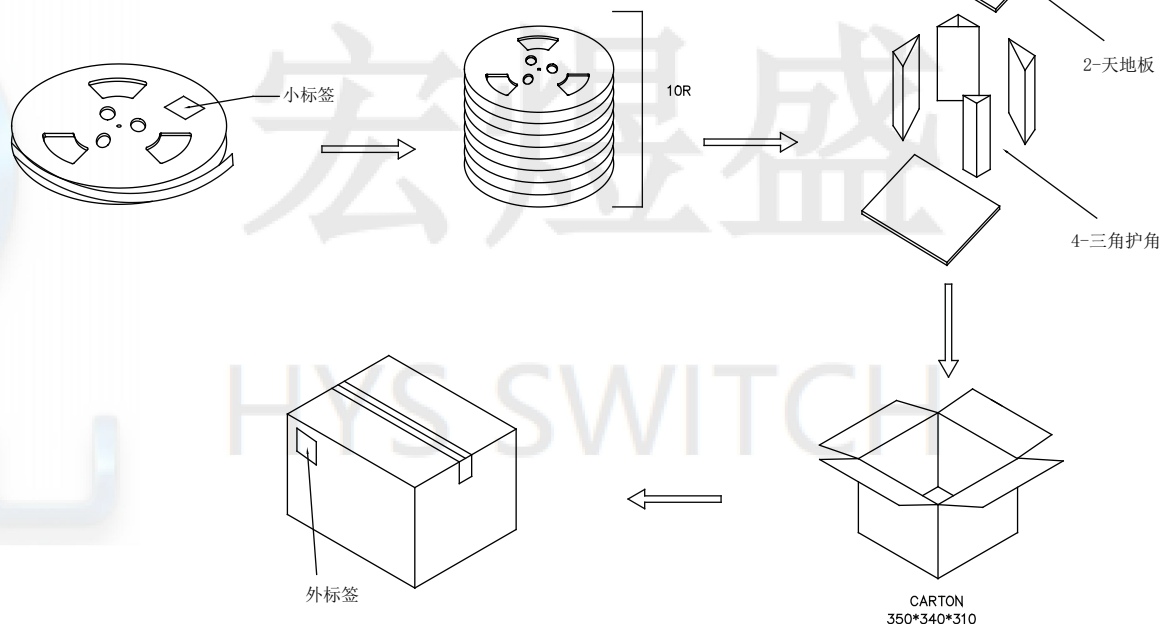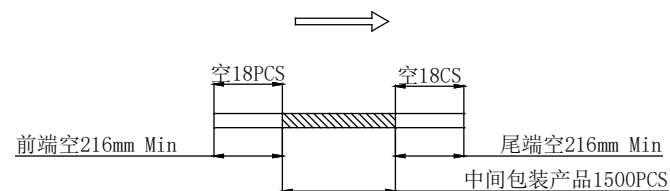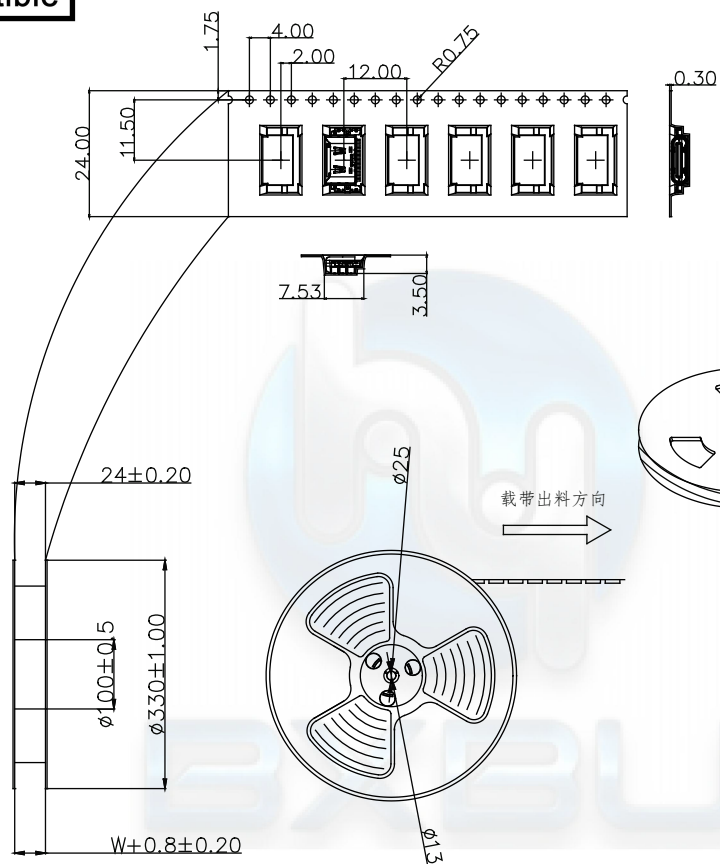

NOTE:

1. QUANTITY/REEL: 1500 PCS
數量/卷: 1500 PCS
QUANTITY/INNER CARTON: 1500 X 10 = 15000 PCS
數量/箱: 1500 X 10 = 15000 PCS
2. FREE 18 CAVES IN THE FRONT CARRIER ADN FREE
18 CAVES IN THE END CARRIER.
包裝帶內圈空18格, 外圈空18格.

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO. U5462-16PN2.03C6.45L	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd. TEL:0752-6632356 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		TITLE: 16P 四脚插板SMT 沉板2.03mm CH=0.35mm 6.45L	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			