
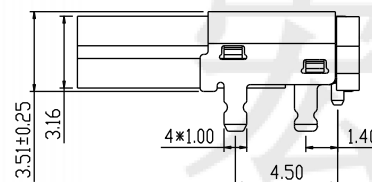
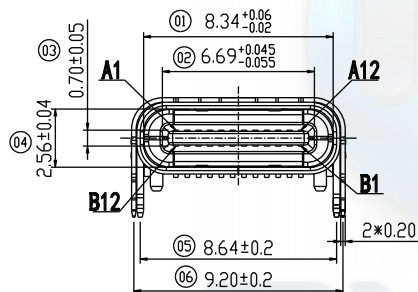

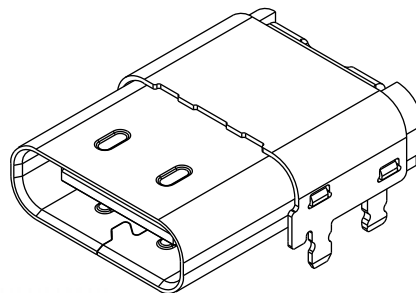



ROHS
Compatible

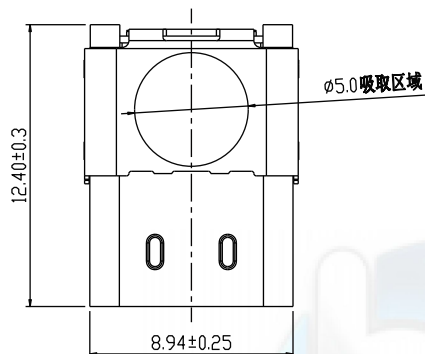

REMARKS (备注):

- CONTACT INSERTION AND WITHDRAW FORCE (插拔力):
 1. Insertion force (插入力): 5N-20N max.
 2. Withdrawal force (拔出力): 8N-20N.
 3. Durability (耐久性): 10000 Cycles.
- ELECTRIC PROPERTY (电气性能):
 - 2.1. Contact current rating (额定电流): 5A.
 - 2.2. Dielectric Strength (介电强度): 100V AC (RMS).
 - 2.3. Insulation Resistance (绝缘电阻): 100 megaohms (兆欧) min.
 - 2.4. Contact resistance (接触电阻): 40mOhms MAX. FOR VBUS, GND AND OTHER CONTACT. 50mOhms MAX. AFTER ENVIRONMENT TEST.
- AMBIENT TEMPERATURE (温度环境):
 - 3.1. Operating temperature (制造温度): -55° C to +85° C.
- Marked "XX" should be FAI DIM (标 "XX" 的为重点管控)

U5 145- 24P x 12.4L
名称 流水号 PIN位 N/母座 L/长度

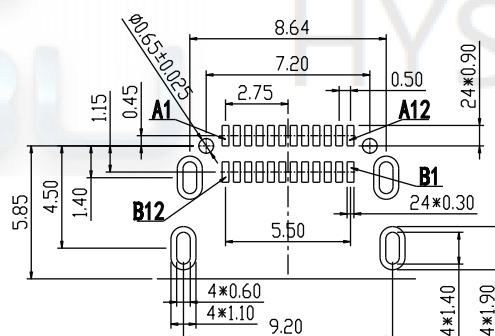

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)

TOLERANCE: ±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSRXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

6	Outer-Shell	SUS-304 T=0.20mm	Ni:50U"
5	Shell	SUS-304 T=0.30mm	Ni:50U"
4	Shrapnel	SUS-304 T=0.12mm	
3	Tatch	SUS-301 T=0.15mm	
2	Terminal	C7025 T=0.15mm	NI:50U", Au:G/F, Sn:60U"
1	Housing	LCP	UL94-0 BLACK
ITEM	DESCRIPTION	MATERIAL	REMARKS

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.

U5145-24PN12.4L

TITLE:

24P 板上 四脚插板SMT 带柱 12.4L



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>