
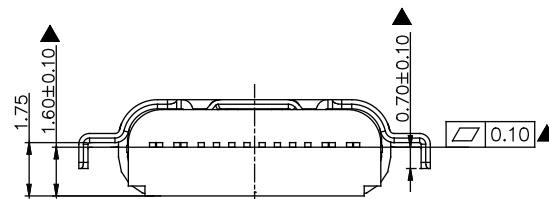





ROHS
Compatible

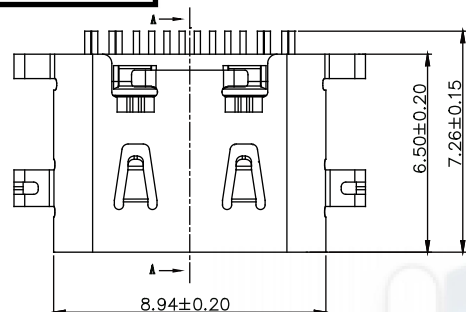

重点管控尺寸 ▲
CPK管控尺寸 ●



NOTES:
SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

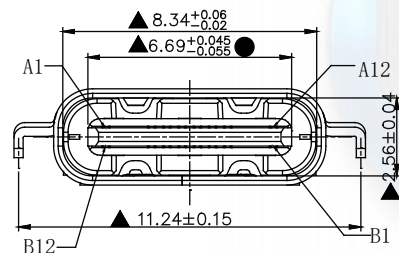


公母对插示意图

U5 477- 16P x x 1.6C 6.5L
名称 流水号 PIN位 N;母座 T;带弹 C;沉板 L;长度

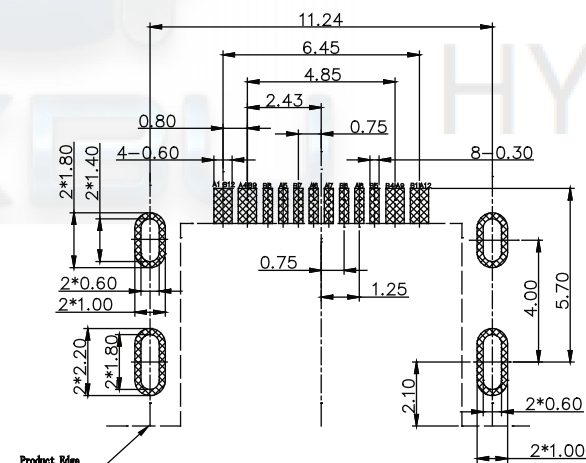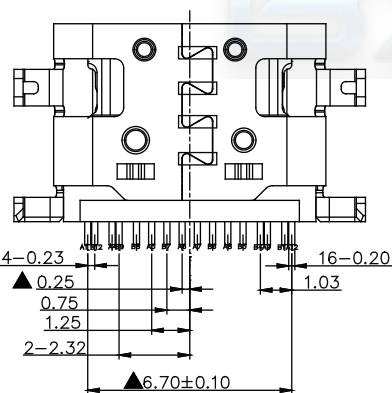

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

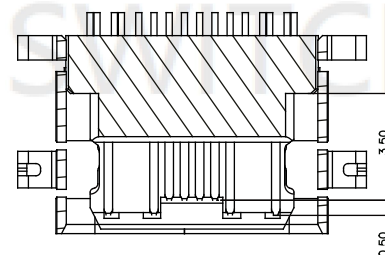

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	SHELL	SUS304	Ni 50U Plated	1PCS
5	SHIELDING PLATE	SUS301	---	1PCS
4	MD	PA10T UL94V-0	BLACK	1PCS
3	CONTACT	C7025	Au 30U/Ni 50U Plated	1SET
2	CONTACT	C7025	Au 30U/Ni 50U Plated	1SET
1	HOUSING	PA10T UL94V-0	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10








TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5477-16PNT1.6C6.5L
TITLE:	16P 沉板1.6mm 四脚插板SMT 带弹 6.5L



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

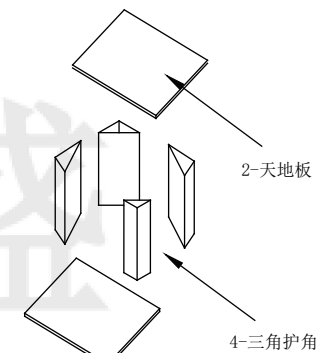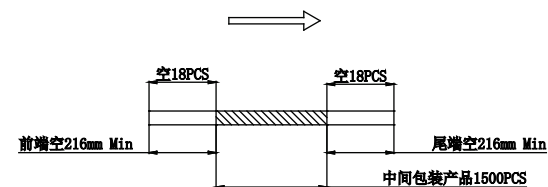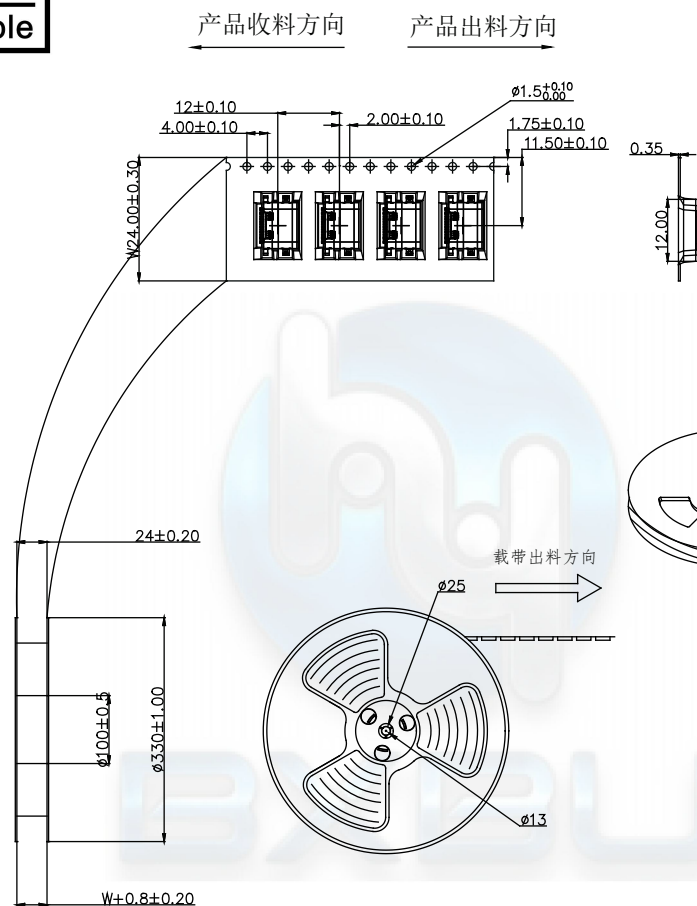

NOTE:

1. QUANTITY/REEL: 1500 PCS
数量/卷: 1500 PCS
QUANTITY/INNER CARTON: 1500 X 10 = 15000 PCS
数量/箱: 1500 X 10 = 15000 PCS
2. FREE 18 CAVE IN THE FRONT CARRIER ADN FREE 18 CAVE IN THE END CARRIER.
包装带内圈空18格, 外圈空18格.

DESIGN	Li Jinwei	SCALL			DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm	TOLERANCE	U5477-16PNT1.6C6.5L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	X.X ±0.30 X.°±2°	TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10	.XX ±0.20 .X°±1°	16P 沉板1.6mm 四脚插板SMT 带弹 6.5L
				.XXX ±0.10 .XX°±0.5°	



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>