
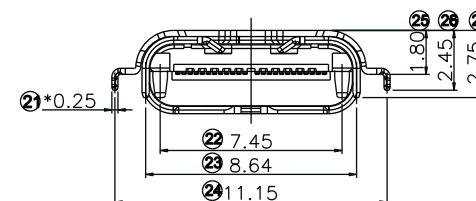
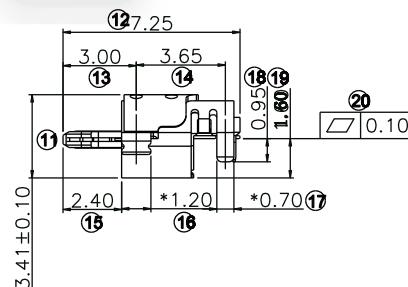

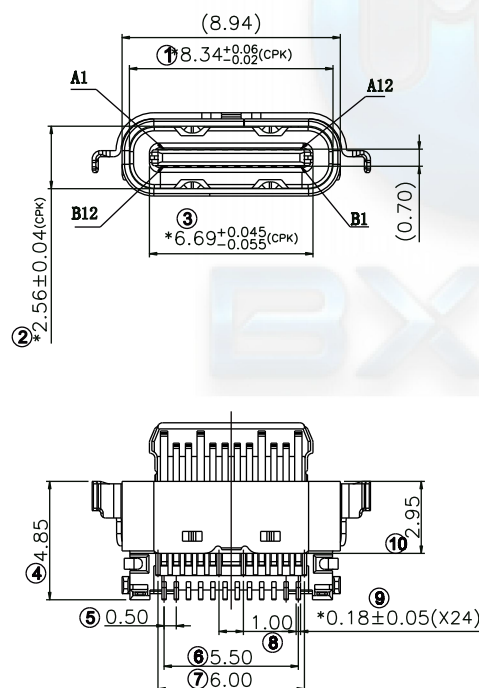



ROHS
Compatible

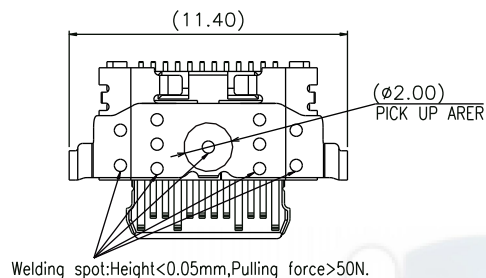

NOTES:

1. PRODUCT SPECIFICATIONS:

1.1. CURRENT RATING: 1.5A/PIN MAX(A4,A9,B4,B9)

1.25A/PIN MAX(A1,A12,B1,B12),0.25A(OHER PIN)

1.2. TEMPERATURE RANGE: -40 °C ~ 85 °C

1.3. CONTACT RESISTANCE: 30 MILLIONHM MAX

1.4. INSULATION RESISTANCE: 100 MEGOHMS MIN.

1.5. DIELECTRIC WITHSTANDING VOLTAGE:100 VAC

1.6. PULG INSERTION DIRECTION WITHSTANDS

INSERTION FORCE >13.6Kg

1.7. INSERTION FORCE : 5N~20N

1.8. UNMATING FORCE:INITIAL:8N~20N;DURABILITY:6N~20N

1.9. DURABILITY: 10,000 CYCLES


(1.6/1.7/1.8/1.9 Need to cooperate with the whole machine test)

U5	110-	24P	x	1.6C	x	7.25L
名称	流水号	PIN位	N;母座	C;沉板	W;舌头外露	L;长度


DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd. TEL:0752-6632356 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		U5110-24PN1.6CW7.25L	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P 沉板1.6 四脚插板SMT 舌片外露2.4mm 7.25L	

ROHS

Compatible

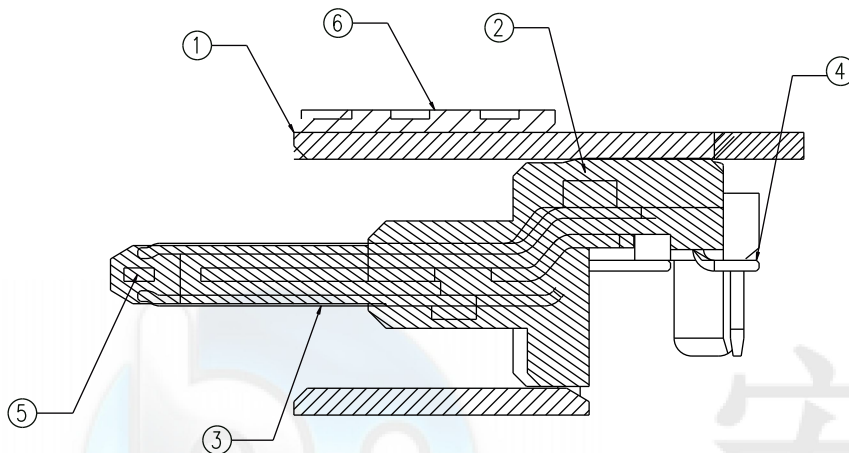

SECTION A-A

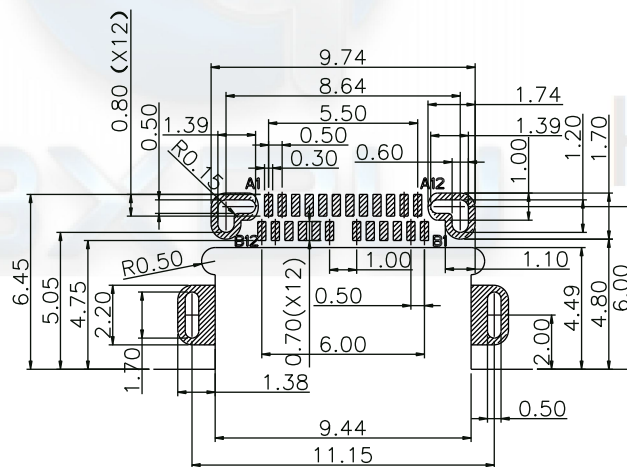

RECOMMENDED P.C.B. LAYOUT (THICKNESS:0.80MM)

TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

PIN ASSIGNMENT

pin	Signal name	pin	Signal name	pin	Signal name	pin	Signal name
A1	GND	B12	GND	A7	Dn1	B6	Dp2
A2	SSTXp1	B11	SSRXp1	A8	SBU1	B5	CC2
A3	SSTXn1	B10	SSRXn1	A9	VBUS	B4	VBUS
A4	VBUS	B9	VBUS	A10	SSRXn2	B3	SSTXn2
A5	CC1	B8	SBU2	A11	SSRXp2	B2	SSTXP2
A6	Dp1	B7	Dn2	A12	GND	B1	GND

6	SHELL-2	1PCS	STAINLESS STEEL	50u" MIN. Ni UNDERPLATING OVERALL
5	MID PLATE	1PCS	STAINLESS STEEL	50u" MIN. Ni UNDERPLATING OVERALL
4	CONTACT B	1SET	COPPER ALLOY	Au 15u" PLATING ON CONTACT AREA Au 1~3u" PLATING ON SOLDER AREA
3	CONTACT A	1SET	COPPER ALLOY	50u" MIN. NICKEL UNDER PLATING ALL OVER
2	HOUSING	1PCS	NYLON	COLOR:BLACK
1	SHELL-1	1PCS	STAINLESS STEEL	50u" MIN. Ni UNDERPLATING OVERALL
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X.°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	U5110-24PN1.6CW7.25L
DRAWING	Wu Qifa	UNIT	mm		TITLE:	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			24P 沉板1.6 四脚插板SMT 舌片外露2.4mm 7.25L






广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

BXBU TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

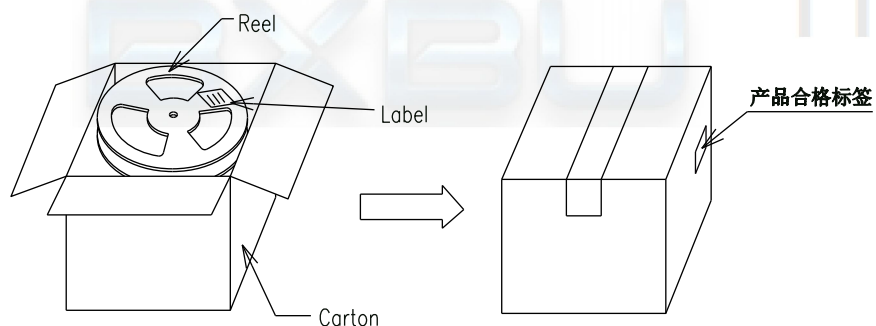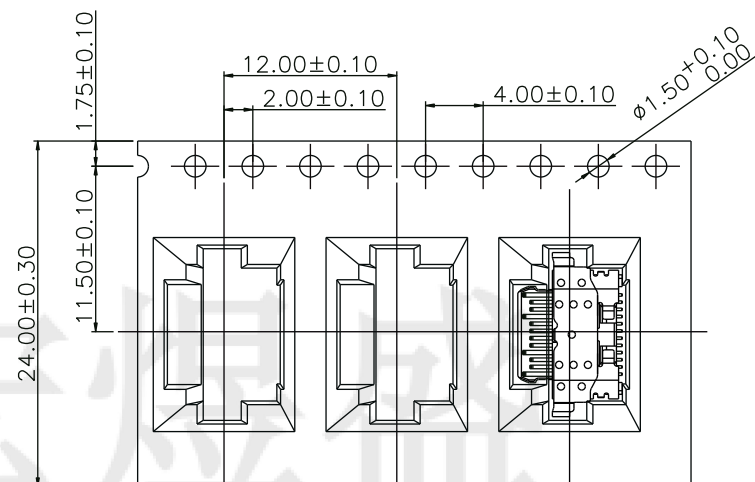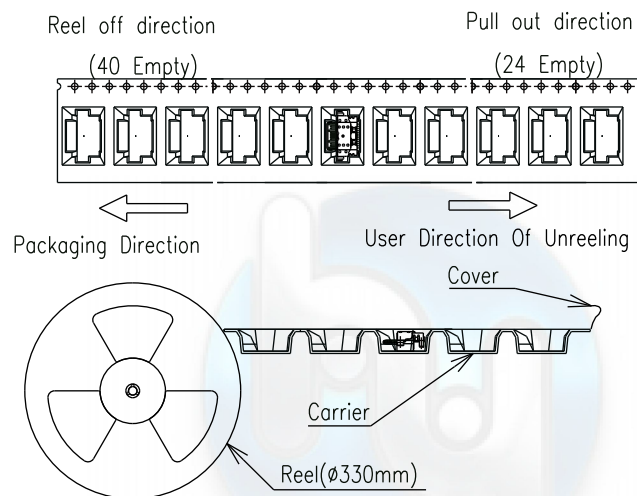

- NOTES:
1. 载带材质:PS 透明
 2. 包装内容: SEE TABLE A

TABLE A :

PCS/REEL	REEL/CARTON	QTY/CARTON	CARTON SIZE/MM
1500	10 REEL	15000 PCS	340*340*300

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5110-24PN1.6CW7.25L
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		

TOLERANCE		
X.X	±0.30	X.°±2°
.XX	±0.20	.X° ±1°
.XXX	±0.10	.XX°±0.5°



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>

24P 沉板1.6 四脚插板SMT 舌片外露2.4mm 7.25L