

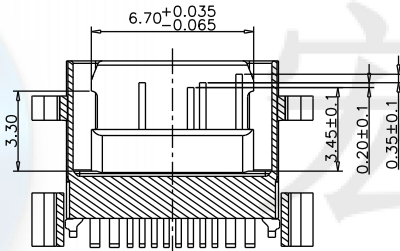


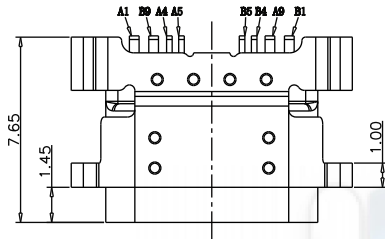
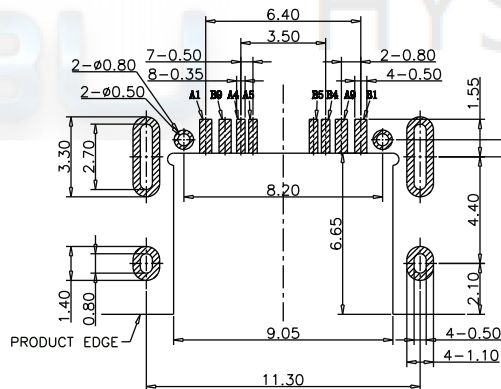



ROHS
Compatible



SECTION B-B
SCALE 1:1



RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

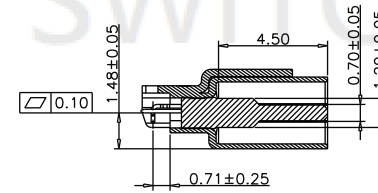

SECTION A-A
SCALE 1:1



USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B9	VBUS
A4	VBUS		
A5	CC1		
		B5	CC2
A9	VBUS	B4	VBUS
		B1	GND

TABLE:

NO	PART	Q'TY	Material
1	SHELL-1	1	STAINLESS STEEL, Ni PLATED 30u"Min
2	SHELL-2	1	STAINLESS STEEL, Ni PLATED 30u"Min
3	CONTACT	12	COPPER STEEL, Ni 50u"Min; Au u"
4	MID PLATE	1	STAINLESS STEEL, NO PLATING
5	MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

备注 (NOTE):

1. 电气特性:

1.1. 接触区: 接触电阻 40mΩ Max, 允许 10mΩ 变化量. 测试条件: 20mv, 100mA 下测量.

1.2. 接触电流: 3A VBUS 引脚; 1.25A 用于 GND 引脚; 其他引脚为 0.25A.

1.3. 额定电压: 30V.

1.4. 耐电压: 100VR. M. S.

1.5. 绝缘电阻: 至少 100 兆欧.

2. 机械性能:

3.1. 插入力: 0.51-2.04Kg

3.2. 拔出力: 0.82-2.04Kg

3.3. 耐久性: 0.61-2.04Kg

3.4. 插拔次数: 10000 次.

4. 可焊性: 温度 210-230℃, 时间 10 秒.

5. 工作环境: -20℃ to +85℃.

名称 流水号 PIN 位 N; 母座 C; 沉板 L; 长度 F; 防水

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10





TOLERANCE	
X.X ±0.30	X.° ±2°
.XX ±0.20	.X° ±1°
.XXX ±0.10	.XX° ±0.5°

DRAWG NO.	U5169-08N1.5C7.65LF
TITLE:	防水 8P 四脚插板 SMT 沉板 1.5mm 7.65L IPX7



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

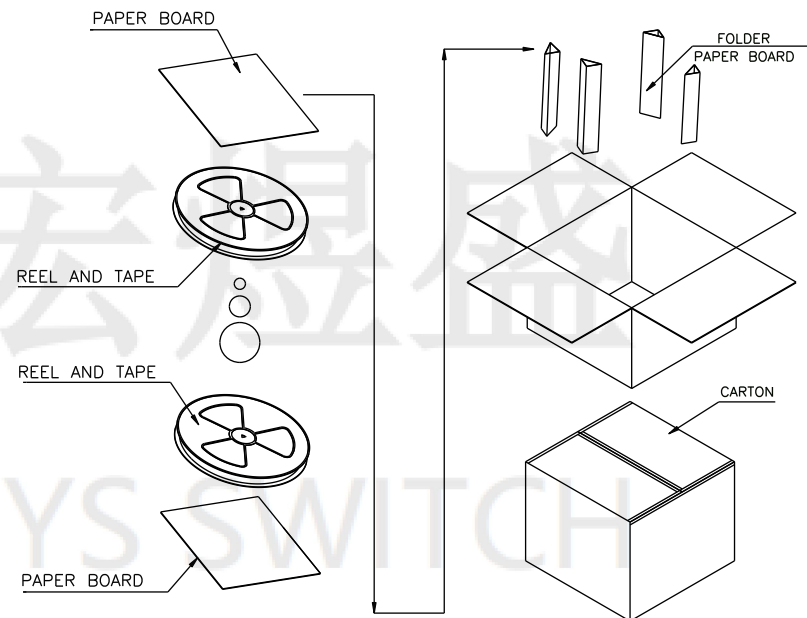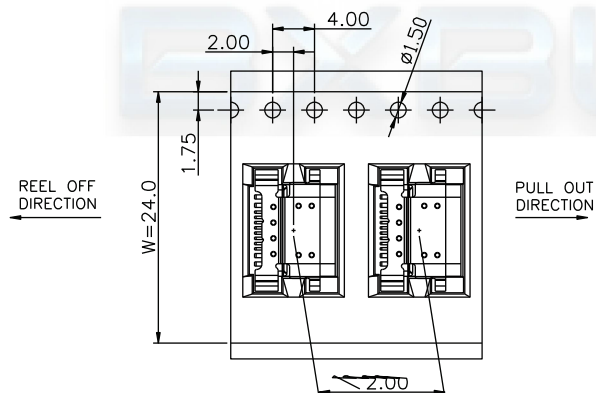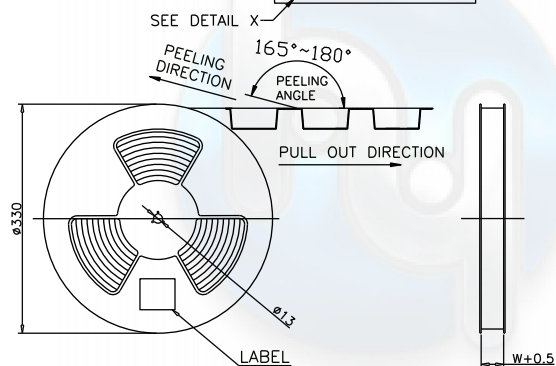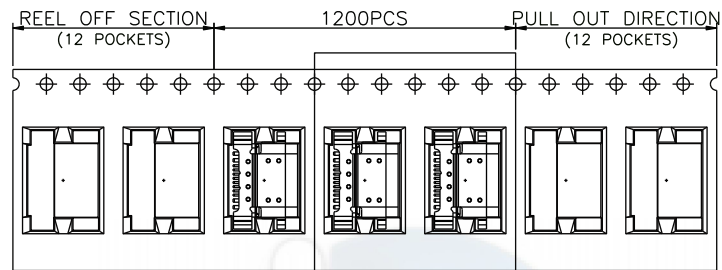

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5169-08N1.5C7.65LF
TITLE:	防水 8P四脚插板SMT 沉板1.5mm 7.65L IPX7

CONNECTOR (PCS)	REEL	CARTON
	1200	12000



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>