
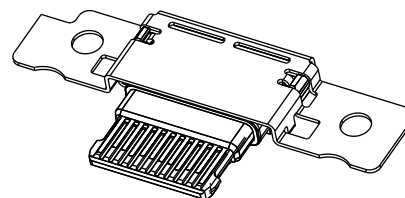




ROHS

Compatible



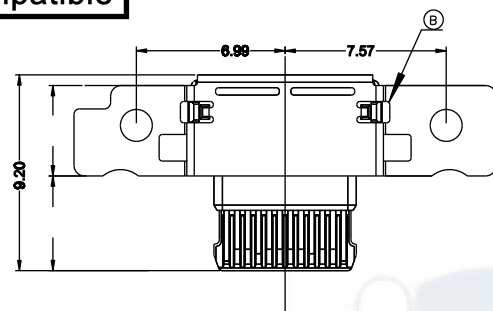


SPECIFICATION:

1. CURRENT RATING: 5.0 A
2. VOLTAGE RATING: 5.0 V
3. VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX
SHIELD: 50mΩ/MAX
LLCR MAX. CHANGE OF ALL PINS: 10Ωm
4. INSULATION RESISTANCE: 100MΩ MIN
5. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE
6. INSERTION FORCE: 0.5~2.0kgf
7. UNMATING FORCE: 0.8~2.0kgf
8. DURABILITY: 10000 CYCLES
9. OPERATING TEMPERATURE: -25°C~+85°C
10. THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 280°C

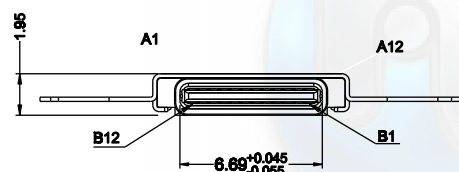

U5 ↓ 名称	408- ↓ 流水号	24P ↓ PIN位	x ↓ N:母座	x ↓ M:带耳	x ↓ W:舌头外露	9.2L ↓ L:长度
---------------	------------------	------------------	----------------	----------------	------------------	-------------------

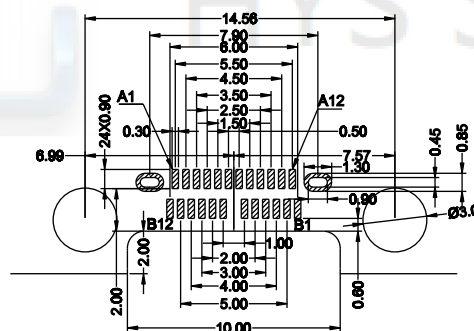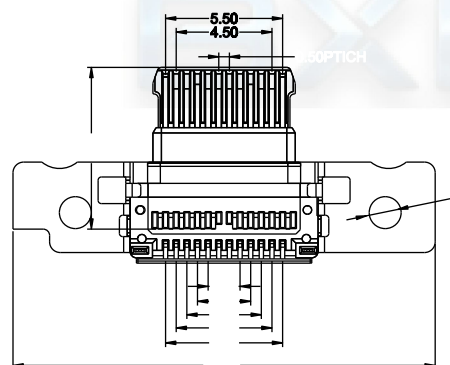

RECOMMENDED PCB LAYOUT T=0.6
TOLERANCE:±0.05

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	SSTXP1	SSTXN1	VBUS	CC1	D+	D-	SBU1	VBUS	SSRDN2	SSRXP2	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	SSRXP1	SSRDN1	VBUS	SBU2	D-	D+	CC2	VBUS	SSTXN2	SSTXP2	GND

1	SHELL	SUS304	NI PLATED
2	MID PLATE	STAINLESS STEEL	SUS301 NO PLATED
3	HOUSING	HIGH TEMPERATURE PLASTIC	PA6T BLACK UL 94 V-0
4	CONTACT	COPPER ALLOY(C7025)	ALL PLATING ON CONTACT AREA
5	GND PLATE	STAINLESS STEEL	SUS304 NO PLATED
NO.	PARTS	MATERIAL	REMARKS

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	 广东宏煜盛电子科技有限公司 Guangdong Hongyusheng Electronic Technology Co., Ltd TEL:0752-6632356 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		U5408-24PNMW9.2L	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:	
APPROVAL	Liu Xiaohong	DATE	2020-06-10		24P 板上后两脚插SMT CH=0.25 带耳 舌头外露 9.2L	




广东宏煜盛电子科技有限公司




Guangdong Hongyusheng Electronic Technology Co., Ltd.

EXBU TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

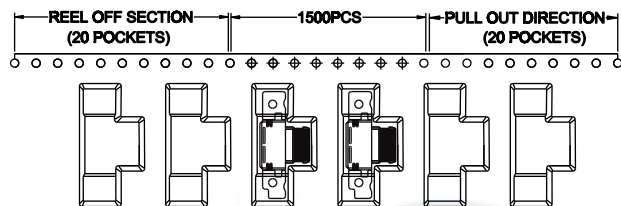

SEE DETAIL X

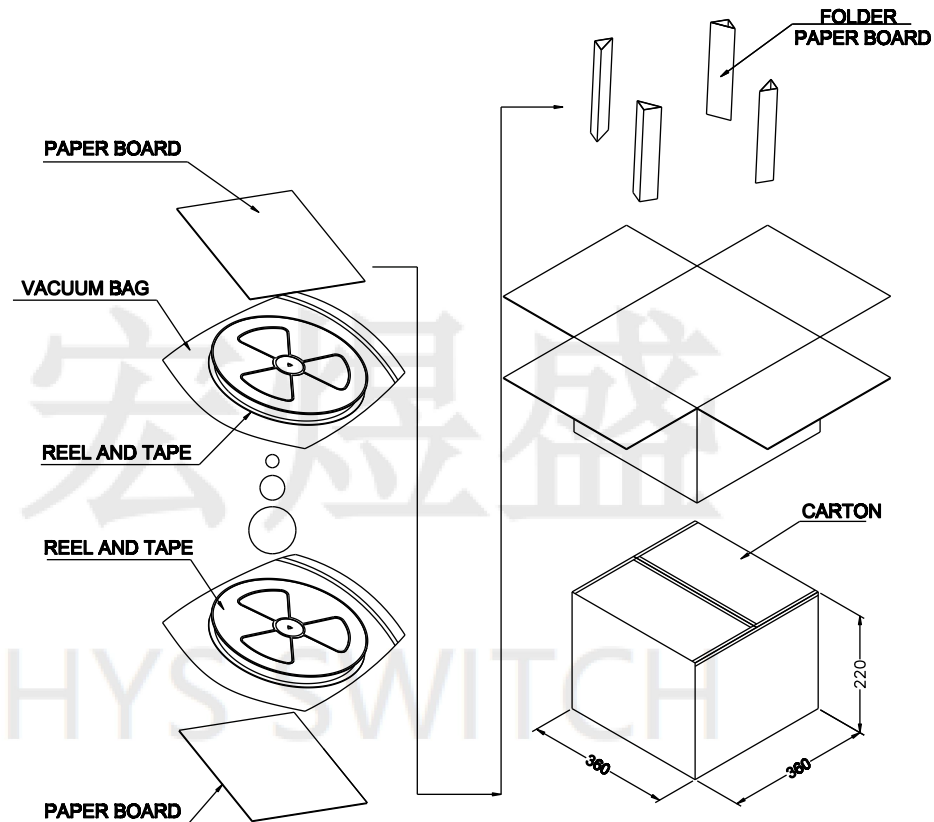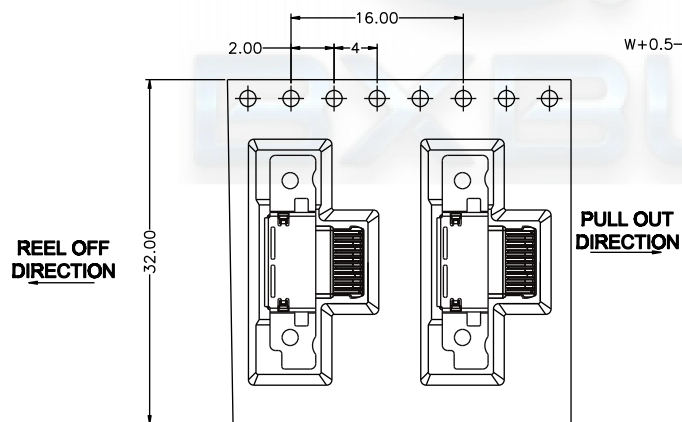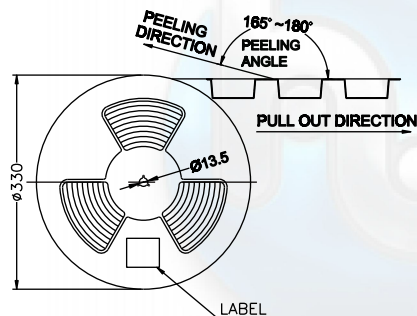

	REEL	CARTON
CONNECTOR (PCS)	1500	9000

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5408-24PNMW9.2L
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	TITLE:
				X.X ±0.30 X.°±2°	24P 板上后两脚插SMT CH=0.25 带耳 舌头外露 9.2L
				.XX ±0.20 .X°±1°	
				.XXX ±0.10 .XX°±0.5°	



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>