

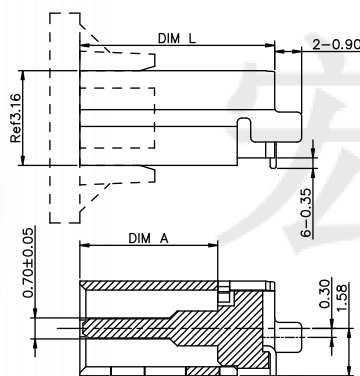
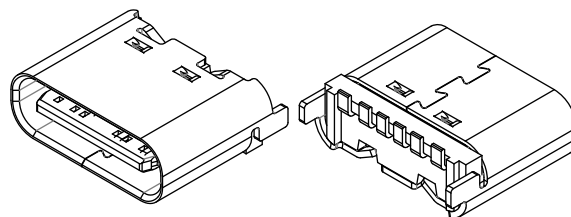


ROHS
Compatible

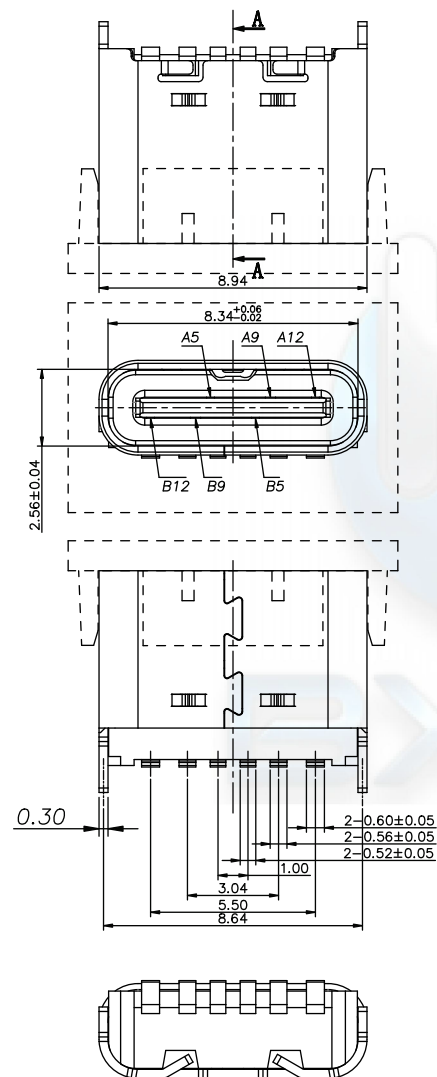

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

NOTE:

1. MATERIAL SPECIFICATION:
1. HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
2. CONTACTS: COPPER ALLOY
2. PLATING SPECIFICATION:
2-1. CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
GOLD FLASH PLATING ON SOLDER AREA
2-2. FRONT SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.
3. MECHANICAL PERFORMANCE,
3-1. INSERTION FORCE: 0.5~2.0kgf.
3-2. REMOVAL FORCE: 0.8kgf~2.0kgf.
3-3. DURABILITY: 10000 CYCLES.
4. ELECTRICAL PERFORMANCE,
4-1. CURRENT RATING: 5.0A
VOLTAGE RATING: 20V
4-2. INSULATION RESISTANCE: 100M Ω MIN
4-3. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
4-4. LOW CONTACT RESISTANCE: INITIAL 40M Ω / AFTER 50M Ω
5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -30°C~+80°C.
6. IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

U5 065- 06P x XXL
↓ ↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 L;长度

DIM	L	DIM	A
6.80	4.90		
6.50±0.10	4.60		


DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ± 0.30	X.° $\pm 2^\circ$
.XX ± 0.20	.X° $\pm 1^\circ$
.XXX ± 0.10	.XX° $\pm 0.5^\circ$

DRAWG NO.	U5065-06PNXXL
TITLE:	6P 板上立式两脚插板SMT

 **广东宏煜盛电子科技有限公司**
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>


ROHS
Compatible

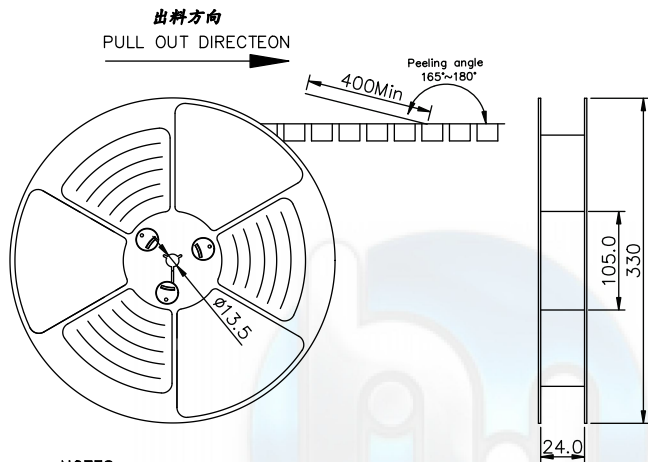

NOTES

1.帶子引導長度
LEAD TAPE LENGTH

出料方向
PULL OUT DIRECTEON

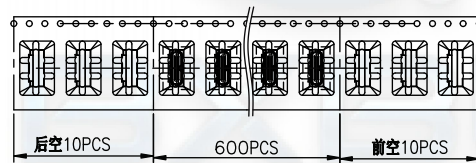

2.上帶剝力為: 0.1~1.3N(10.2gf~130gf)


PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)

出貨運輸過程中一定注意:

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:

卷帶在運輸過程中不能散開

PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

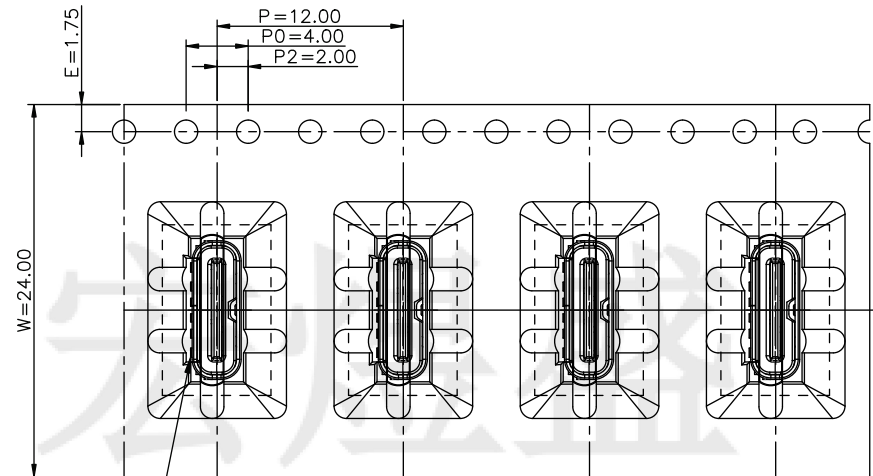

焊脚插左

TAPE & REEL 10 PCS

1 REEL
= 600 PCS

BOX

DIMENSIONS:
33.5X33.5X30.5

LABEL

1 CARTON
=10 REELS
=6000 PCS

包裝明細表 (The detail of the packing) Carton

產品料號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
U5065-06PNXXL	600	10	6000	----	----	----

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°
DRAWING	Wu Qifa	UNIT	mm	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297	
APPROVAL	Liu Xiaohong	DATE	2020-06-10	

DRAWG NO.

U5065-06PNXXL

TITLE:

6P 板上立式两脚插板SMT



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>