

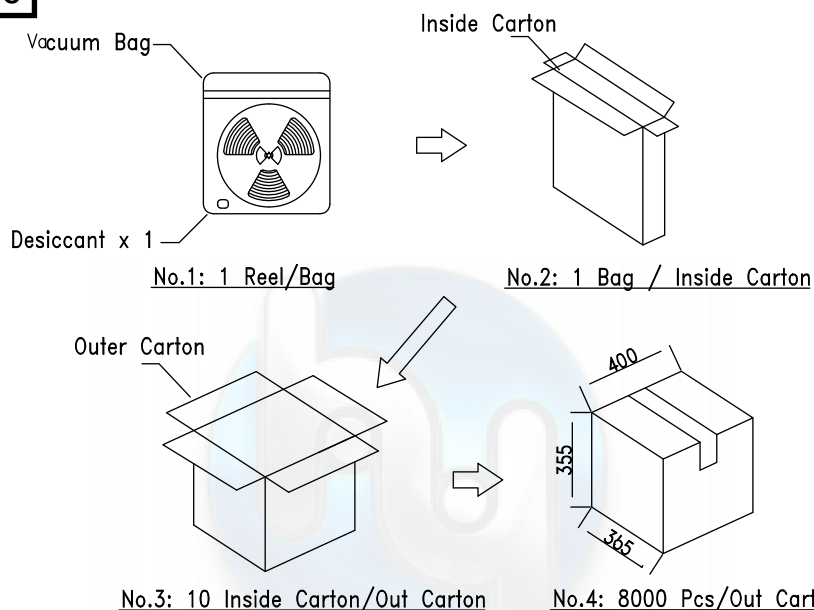
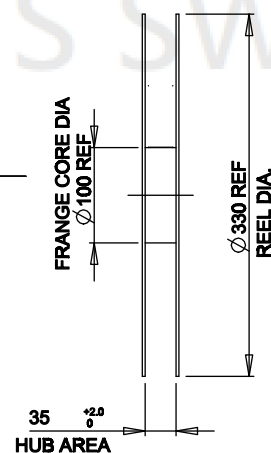


ROHS
Compatible

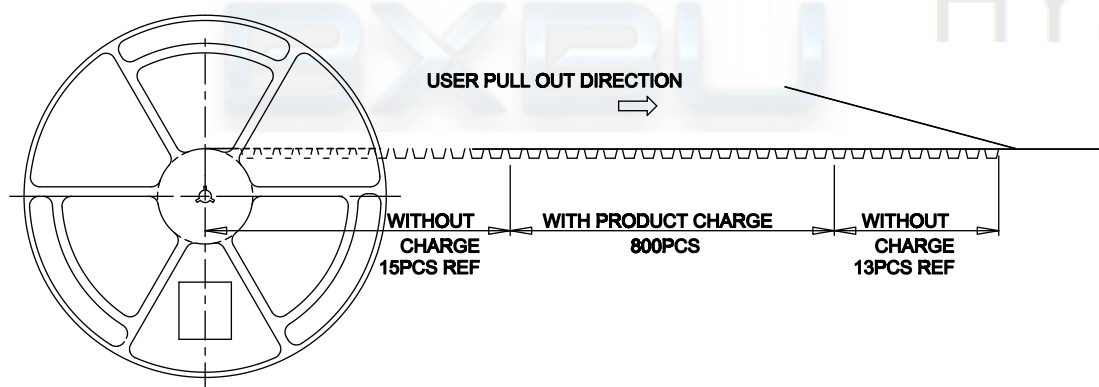

ITEM	W	AO	BO	D	E	F	KO	PO	P2	P	T
DIM	32.0	9.70	17.70	1.5	1.75	14.20	4.50	4.0	2.0	16.0	0.40
TOLE	+0.3 -0.3	+0.15 -0.15	+0.15 -0.15	+0.1 -0.0	±0.1	±0.10	+0.15 -0.15	±0.1	±0.1	±0.1	±0.05

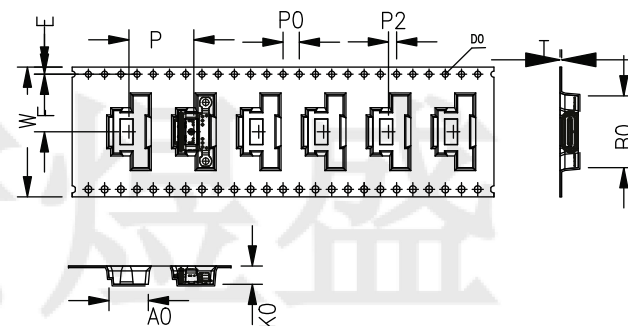

包装说明:

1. 将产品放入REEL卷中, 然后贴上透明PE上带800PCS/卷;
2. 然后尾部用胶纸粘贴, 在REEL卷盘上贴上数量标签;
3. 将包装好的产品放入指定的外箱中, 一箱装10盘, 8000 PCS/箱;
4. 出货标签要严格按照要求进行填写;
5. 纸箱封盖后以封箱胶封箱, 贴上出货标签;
6. 外箱若客户另有贴标签要求, 则按其订单注明之要求贴;
7. 纸箱尺寸及印刷见包材图面;
8. 未滴之零数箱需以缓冲材料填满, 并贴上零数标签, 写明具体数量;
9. 本包装适装产品: USB TYPE C母座24P 双排SMT 防水型 ;
10. ROHS+HF.

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5189-24PNMW8.65LF
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	
				X.X ±0.30	X.°±2°
				.XX ±0.20	.X°±1°
				.XXX ±0.10	.XX°±0.5°



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TITLE:
防水24P 板上四脚插板SMT 带耳 舌头外露 8.65L IPX8

BXBU

TEL:0752-6632356 <https://www.hystypec.com>