
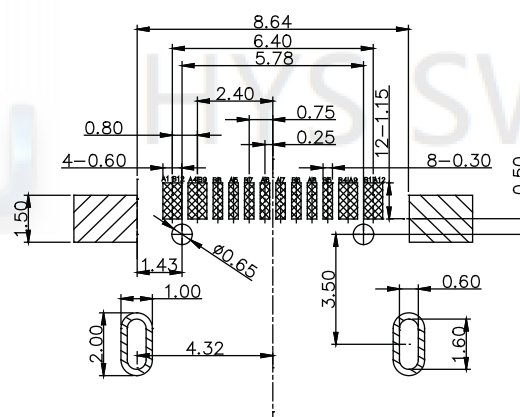
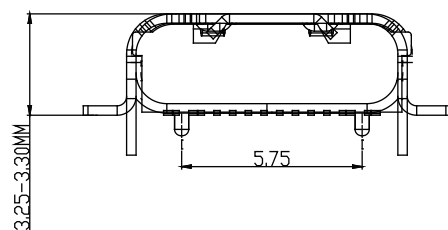
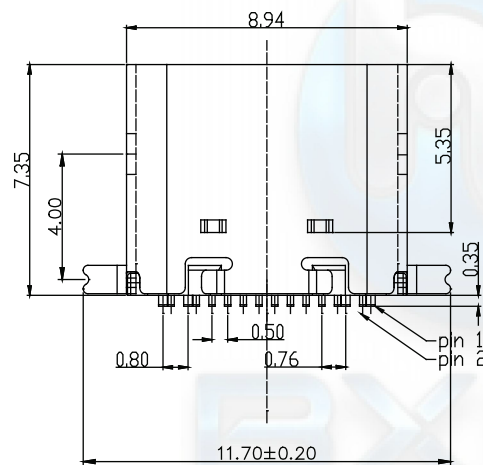
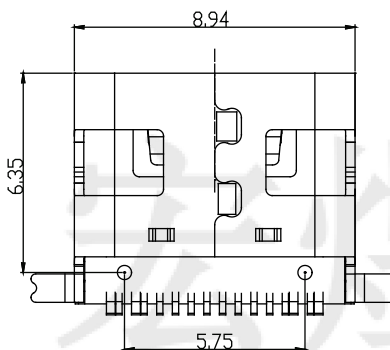

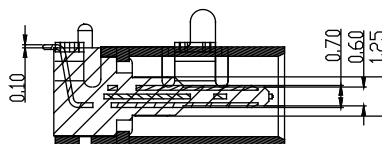


ROHS
Compatible

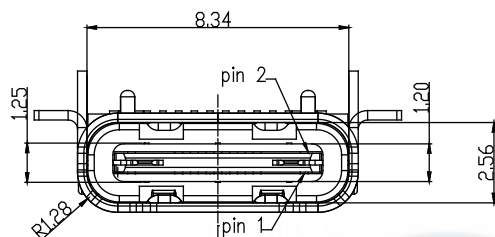

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

Product Edge

備注:

1. 材質:

1.1 端子: C5191R-EH, T=0.15mm.

1.2 胶芯: LCP+30%GF; 顏色: 黑色

1.3 外壳: SUS 304R-1/2H.T0.30mm

2. 电镀:

2.1 端子: 电镀镍底50u"Min. (焊接区域) 锡脚
电镀亮锡80u"Min.

2.2 外壳: 电镀镍底50u"Min.

U5 095- 16P x 7.35L
名称 流水号 PIN位 N; 母座 L; 长度

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.	U5095-16PN7.35L
TITLE:	16P板上 前插后贴带柱SMT 7.35L

**广东宏煜盛电子科技有限公司**
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>