
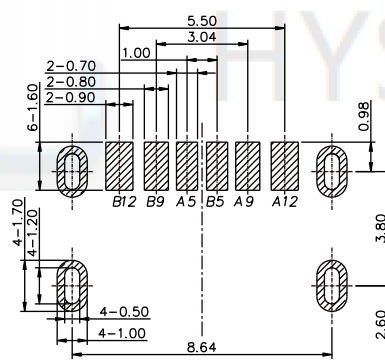

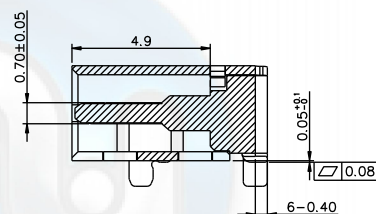
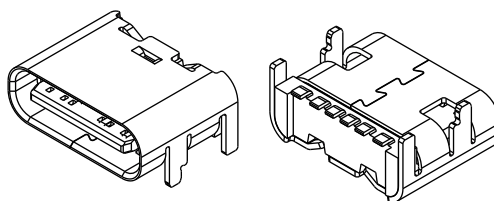





ROHS
Compatible



RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

NOTE:

1. MATERIAL SPECIFICATION:

1. HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
2. CONTACTS: COPPER ALLOY
3. MID-PLATED: STAINLESS STEEL

2. PLATING SPECIFICATION:

- 2-1. CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
GOLD FLASH PLATING ON SOLDER AREA
Ni 30u" MIN. UNDER PLATED OVER ALL.
- 2-2. FRONT SHELL:

3. MECHANICAL PERFORMANCE:

- 3-1. INSERTION FORCE: 0.5~2.0kgf.
- 3-2. REMOVAL FORCE: 0.8kgf~2.0kgf.
- 3-3. DURABILITY: 5000 CYCLES.

4. ELECTRICAL PERFORMANCE:

- 4-1. CURRENT RATING: 5.0A
VOLTAGE RATING: 20V
- 4-2. INSULATION RESISTANCE: 100MΩ MIN
- 4-3. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:

- OPERATING TEMPERATURE: -30°C~+80°C.

6. IR REFLOW:

- THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

U5 061- 06P x 6.8L
↓ ↓ ↓ ↓
名称 流水号 PIN位 N;母座 L;长度

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME
A5	CC1
A9	VBUS
A12	GND
B12	GND
B9	VBUS
B5	CC2

DESIGN	Li Jinwei	SCALL			DRAWG NO.	U5061-06PN6.8L	
DRAWING	Wu Qifa	UNIT	mm		TOLERANCE		TITLE: 6P 板上四脚插板SMT 6.8L
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°		
APPROVAL	Liu Xiaohong	DATE	2020-06-10				



广东宏煜盛电子科技有限公司


Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL: 0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

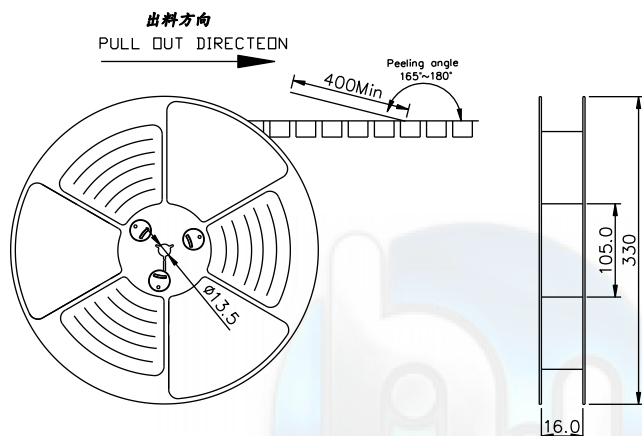

NOTES

1. 帶子引導長度


LEAD TAPE LENGTH

出料方向

PULL OUT DIRECTEON

出料方向

PULL OUT DIRECTEON

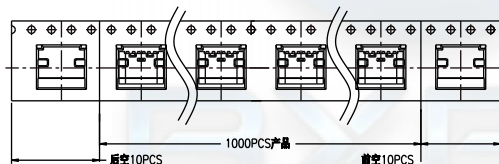

2. 上帶剝力為: 0.1~1.3N(10.2gf~130gf)


PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)

出貨運輸過程中一定注意:

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:

卷帶在運輸過程中不能散開

PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

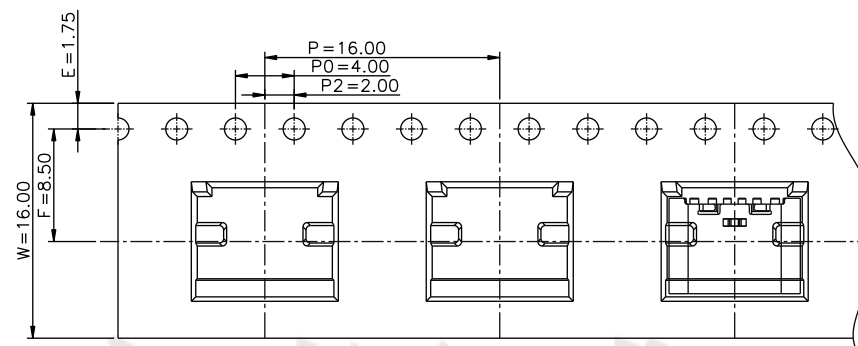

TAPE & REEL 14 PCS

1 REEL
= 1000 PCS

BOX

DIMENSIONS:
33.5X33.5X30.5

LABEL

1 CARTON

=14 REELS
=14000 PCS

包裝明細表 (The detail of the packing) Carton

產 品 料 號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
U5061-06PN6.8L	1000	14	14000			

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.

U5061-06PN6.8L

TITLE:

6P 板上四脚插板SMT 6.8L



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>