
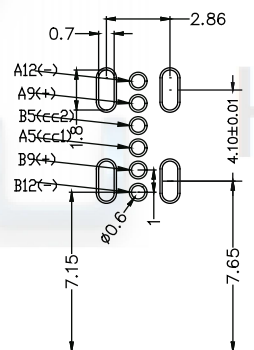
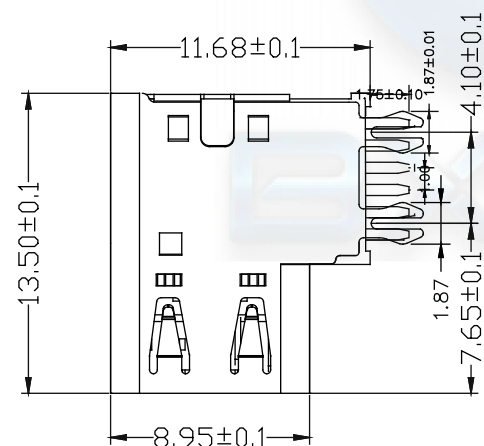
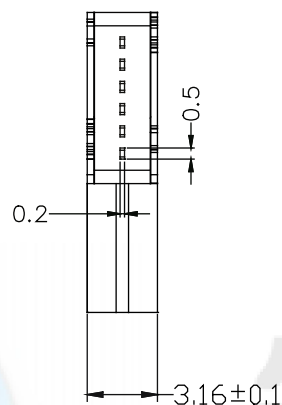


ROHS
Compatible

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

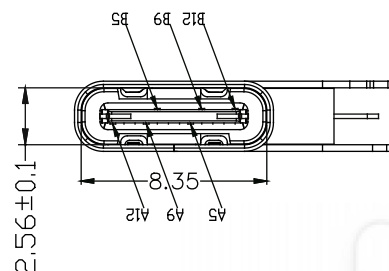

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

U5 073- 06P x x x 2.7G 13.5L
名称 流水号 PIN位 N;母座 T;带弹 Y;鱼插脚 G;垫高 L;长度

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL			DRAWG NO. U5073-06PNTY2.7G13.5L
DRAWING	Wu Qifa	UNIT	mm		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		
APPROVAL	Liu Xiaohong	DATE	2020-06-10		
				TOLERANCE	TITLE:
				X.X ±0.30 X.°±2°	6P 侧插四脚插板DIP 带弹 鱼插脚 垫高2.7mm 13.5L
				.XX ±0.20 .X°±1°	
				.XXX ±0.10 .XX°±0.5°	



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>