
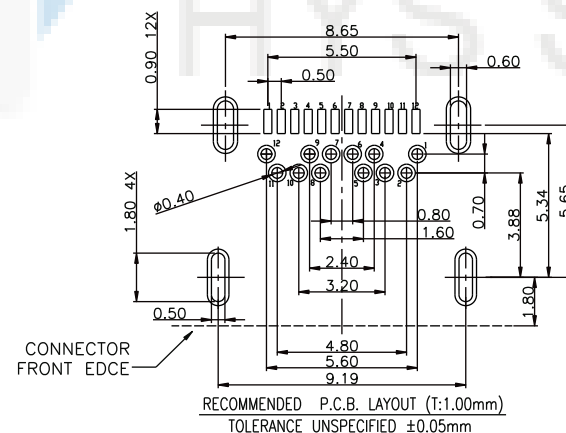
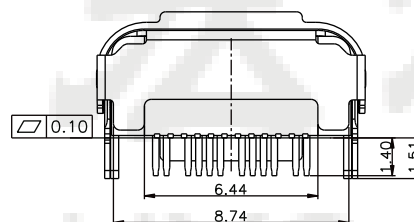
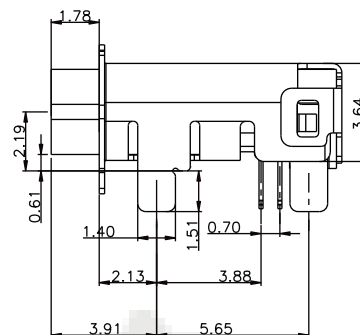
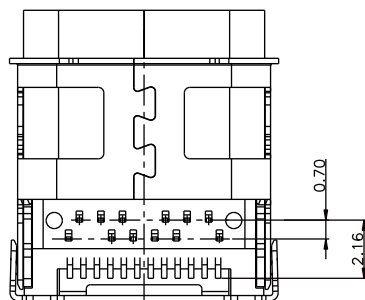
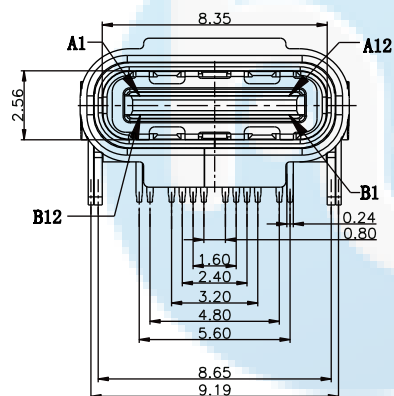


ROHS

Compatible




NOTES:
SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10 000 CYCLES

U5 262- 24P x 10.79L

名称 流水号 PIN位 N;母座 L;长度




A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	SHELL	SUS304-1/2H	NI 30U Plated	
5	SHELL	SUS304-1/2H	NI 30U Plated	1PCS
4	SPRING	SUS304-1/2H	---	1PCS
3	SHIELDING PLATE	SUS301-3/4H	---	1PCS
2	CONTACT	C2680	AuTU/NI50U Plated Welding area AuG/F NI50U	1SET
1	HOUSING	LCP E130i	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 X.°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	U5262-24PN10.79L	 东莞市宏煜盛实业有限公司 Dongguan hongyusheng Industry Co., Ltd TEL: 0769-81230179 https://www.hystypec.com
DRAWING	Wu Qifa	UNIT	mm		TITLE:		
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297				
APPROVAL	Liu Xiaohong	DATE	2020-06-10				

ROHS
Compatible

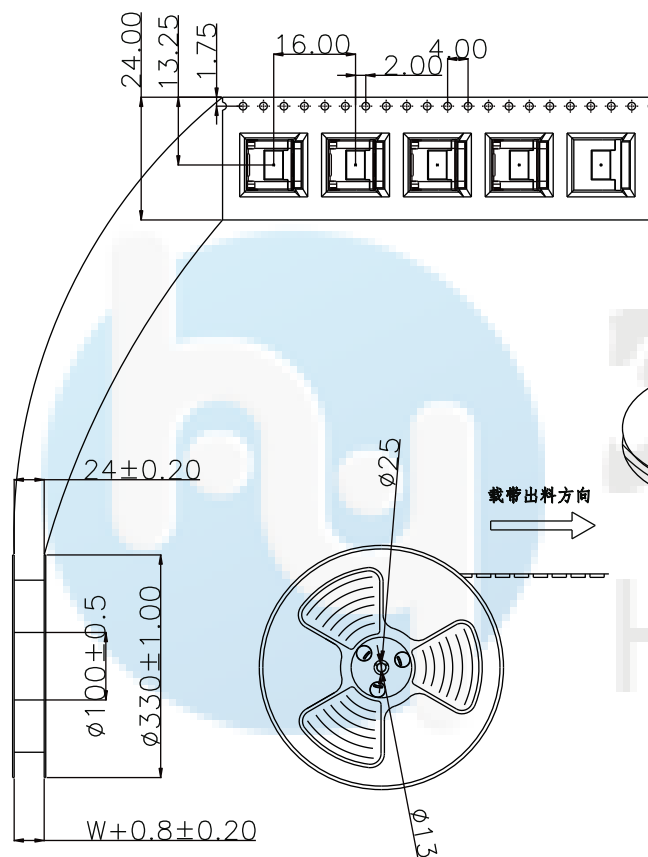

NOTE:

1. QUANTITY/REEL: 600 PCS



數量/卷: 600 PCS

QUANTITY/INNER CARTON: 600 X 10 = 6000 PCS

數量/箱: 600 X 10 = 6000 PCS

2. FREE 15 CAVE IN THE FRONT CARRIER AND FREE 15 CAVE IN THE END CARRIER.

包裝帶內圈空15格, 外圈空15格.

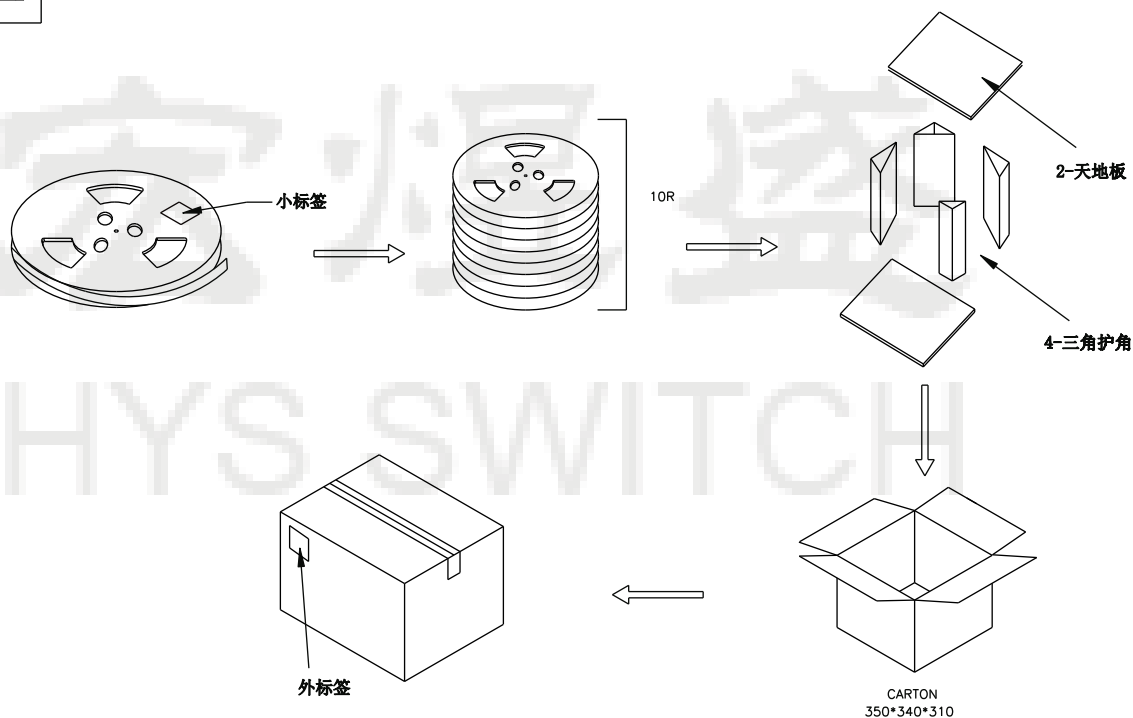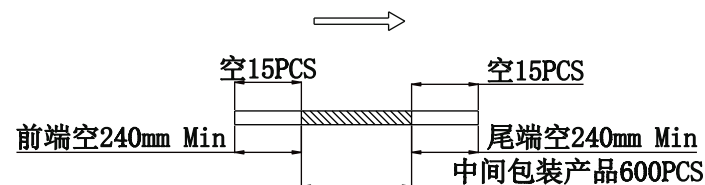

DESIGN	Li Jinwei	SCALE	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	$\frac{\square}{\square}$
TOLERANCE	
X.X ± 0.30	X. $^{\circ} \pm 2^{\circ}$
.XX ± 0.20	.X. $^{\circ} \pm 1^{\circ}$
.XXX ± 0.10	.XX. $^{\circ} \pm 0.5^{\circ}$

DRAWG NO.	U5262-24PN10.79L
TITLE:	24P 板上四脚插板DIP+SMT 10.79L

 东莞市宏煜盛实业有限公司
Dongguan hongyusheng Industry Co., Ltd
TEL: 0769-81230179 <https://www.hystypec.com>