

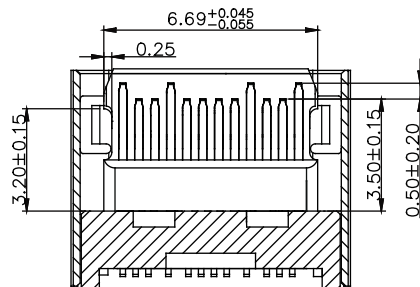
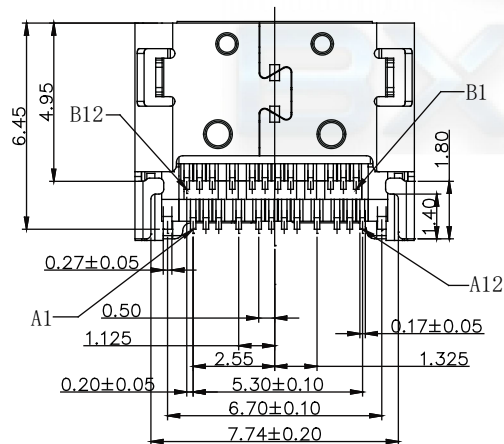
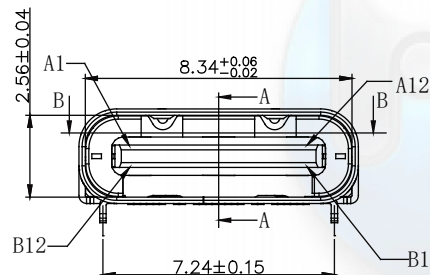
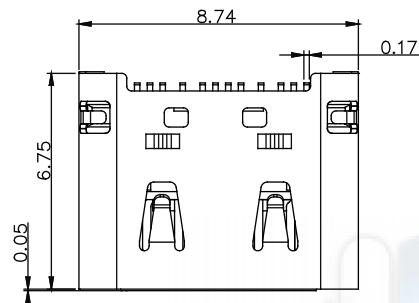


ROHS
Compatible

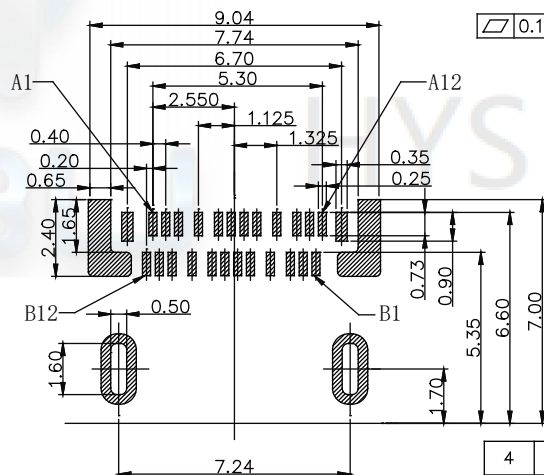


SECTION B-B




RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:
SPECIFICATION:

1. CURRENT RATING: 5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

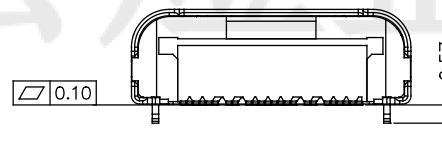

SECTION A-A

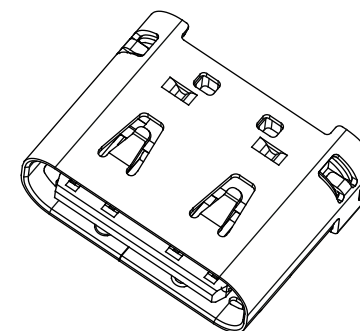

U5 464- 24P x x 6.75L
名称 流水号 PIN位 N;母座 T;带弹 L;长度

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	SHELL	SUS304-1/2H	NI Plated	1PCS
3	SHIELDING PLATE	SUS301-1/2H	NI/SN Plated	1PCS
2	CONTACT	C7025	Au/Ni Plated	2SET
1	HOUSING	LCP	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

TOLERANCE	
X.X ±0.30	X.°±2°
.XX ±0.20	.X°±1°
.XXX ±0.10	.XX°±0.5°

DRAWG NO.

U5464-24PNT6.75L

TITLE:

24P 板上两脚插板SMT 带弹 6.75L






广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.


TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

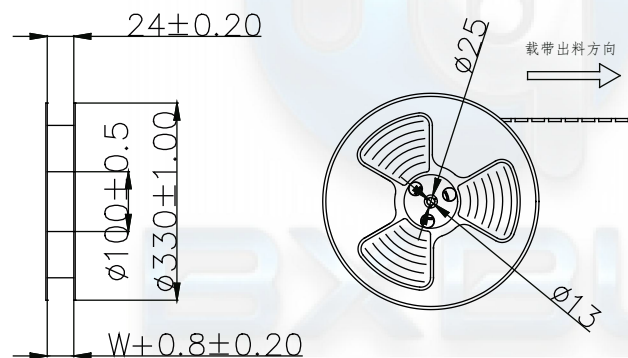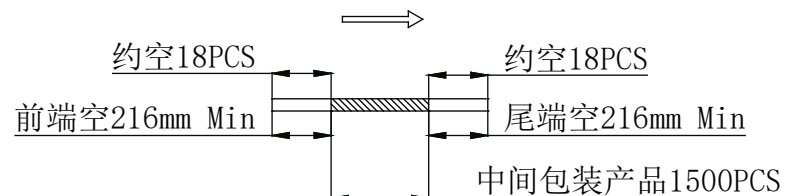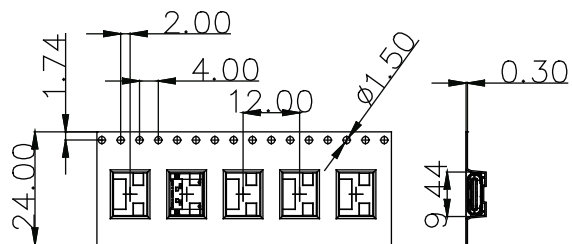

NOTE:

1. QUANTITY/REEL: 1500 PCS
数量/卷: 1500 PCS
QUANTITY/INNER CARTON: 1500 X 10 = 15000 PCS
数量/箱: 1500 X 10 = 15000 PCS
2. FREE 18 CAVE IN THE FRONT CARRIER AND FREE 18 CAVE IN THE END CARRIER.
包装带内圈空18格, 外圈空18格.

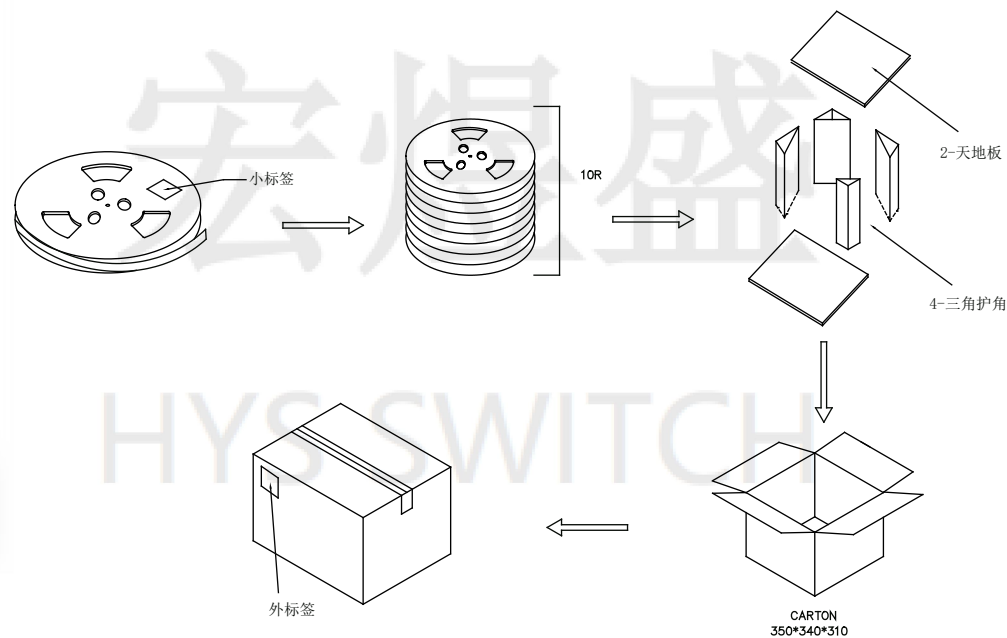

DESIGN	Li Jinwei	SCALL		 TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X° ±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.	U5464-24PNT6.75L
DRAWING	Wu Qifa	UNIT	mm		TITLE:	
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			



广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd

TEL:0752-6632356 <https://www.hystypec.com>





广东宏煜盛电子科技有限公司

Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL: 0752-6632356 <https://www.hystypec.com>