

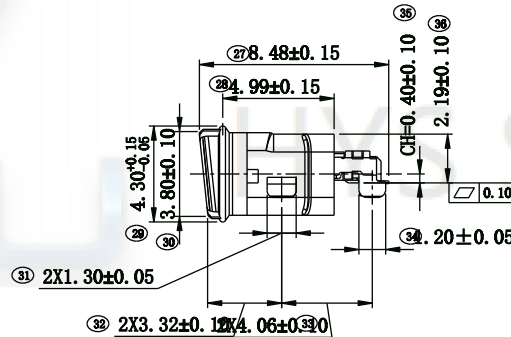
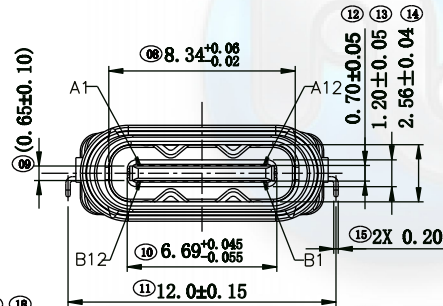

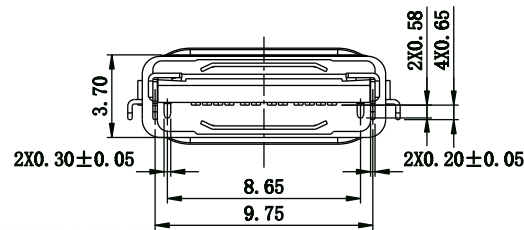


ROHS
Compatible

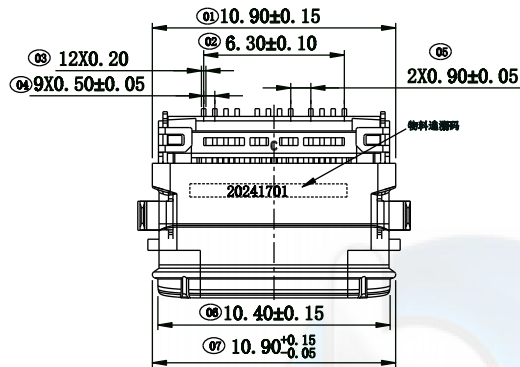

Pin:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

U5 294- 24P x 0.4H 8.48L x
名称 流水号 PIN位 N;母座 H;CH L;长度 F;防水

7	MID PLATE	1	SUS301	SOLDER NICKEL: 50U" MIN
6	TERMINAL	1	C18400	MATING SIDE:AU15U"; SOLDER TAIL:GOLD FLASH, 50u" NICKEL OVERALL.
5	SHELL	1	SUS304	SOLDER NICKEL: 50U" MIN
4	SOLDER PIN	1	SUS304	SOLDER NICKEL: 50U" MIN
3	SHELL HOUSING	1	PA46	BLACK
2	LIM	1	硅胶	BLACK
1	MAIN HOUSING	1	PA46	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
BILL OF MATERIAL				


DESIGN	Li Jinwei	SCALL		TOLERANCE X.X ±0.30 X.°±2° .XX ±0.20 .X°±1° .XXX ±0.10 .XX°±0.5°	DRAWG NO.
DRAWING	Wu Qifa	UNIT	mm		U5294-24PN0.4H8.48LF
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297		TITLE:
APPROVAL	Liu Xiaohong	DATE	2020-06-10		防水24P 四脚插板SMT 沉板 斜口 CH0.4mm 8.48L IP68



广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>



3. 防水等级 IPX8

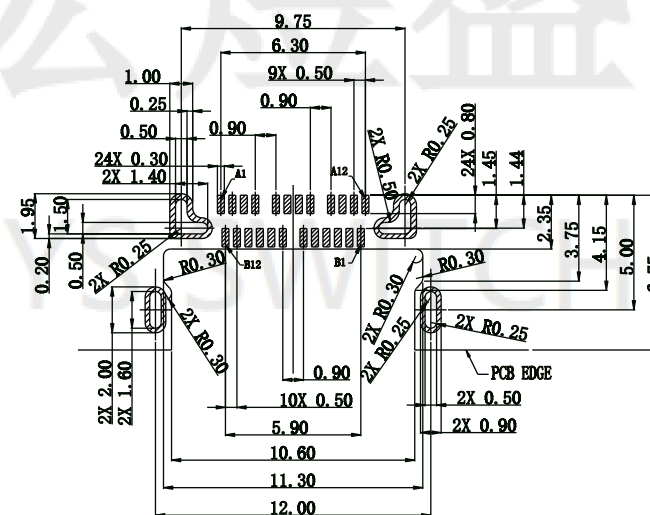



DESIGN	Li Jinwei	SCALL			DRAWG NO. U5294-24PN0.4H8.48LF	
DRAWING	Wu Qifa	UNIT	mm			TOLERANCE .XX ± 0.30 .X° $\pm 2^\circ$.XX ± 0.20 .X° $\pm 1^\circ$.XXX ± 0.10 .XX° $\pm 0.5^\circ$
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297			
APPROVAL	Liu Xiaohong	DATE	2020-06-10			
					TITLE: 防水24P 四脚插板SMT 沉板 斜口 CH0.4mm 8.48L IP68	



Guangdong Hongyusheng Electronic Technology Co., Ltd.

TEL:0752-6632356 <https://www.hystypec.com>

ROHS
Compatible

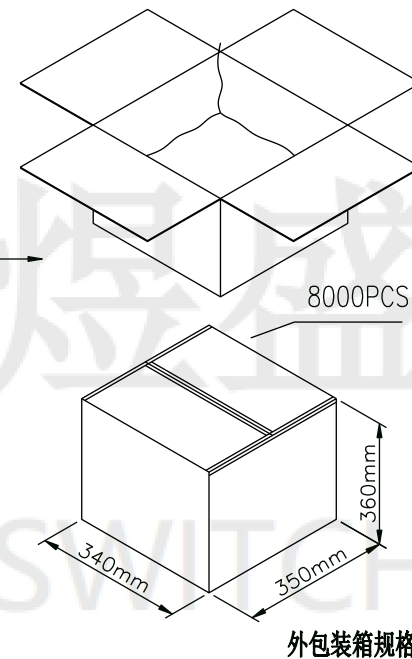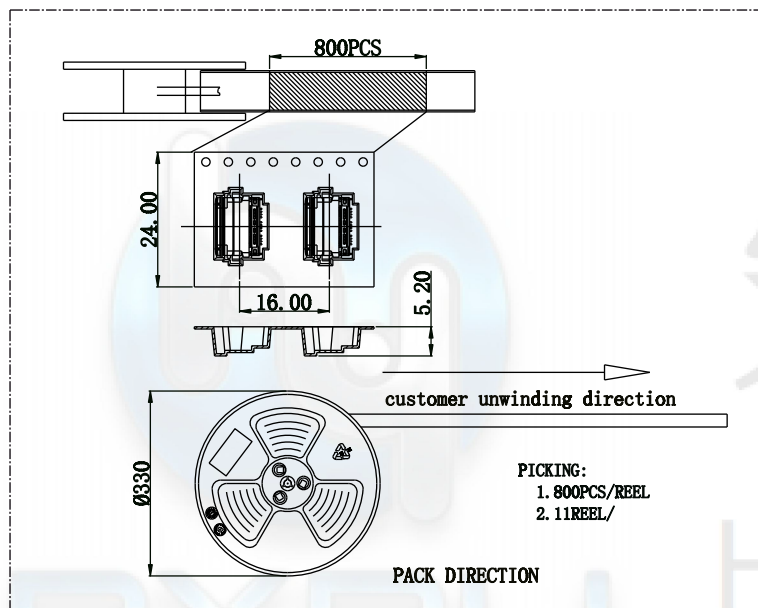

DESIGN	Li Jinwei	SCALL	
DRAWING	Wu Qifa	UNIT	mm
CHECK	Zheng Jinxian	SIZE	A4: 210 * 297
APPROVAL	Liu Xiaohong	DATE	2020-06-10

ϕ	
TOLERANCE	
X.X	± 0.30
.XX	± 0.20
.XXX	± 0.10

DRAWG NO.	U5294-24PN0.4H8.48LF
TITLE:	防水24P 四脚插板SMT 沉板 斜口 CH0.4mm 8.48L IP68

CONNECTOR (PCS)	REEL	CARTON
	800	8800

广东宏煜盛电子科技有限公司
Guangdong Hongyusheng Electronic Technology Co., Ltd.
TEL:0752-6632356 <https://www.hystypec.com>